



Datasheet

ADVANTECH


MIO-5350

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

MIO-5350

Intel® Pentium N4200 Celeron N3350 & Atom™ E3950/E3940/E3930, 3.5" MI/O-Compact SBC, DDR3L, VGA, HDMI/DP*, 48-bit LVDS/eDP*, 2GbE, Mini PCIe, mSATA, iManager, M.2 E Key, *TPM 2.0, MIOe

NEW

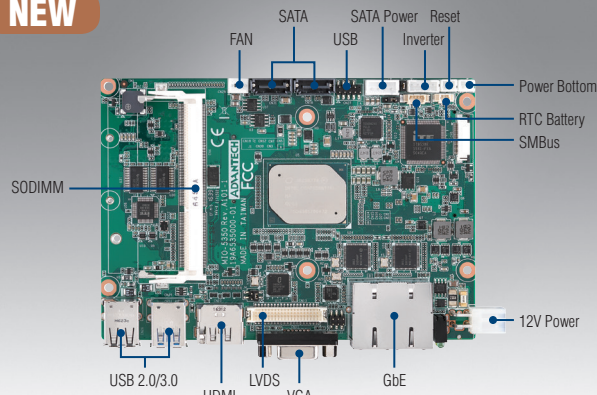

iManager WISE-PaaS/RMM **CE FCC**

Features

- Intel® Pentium N4200 & Celeron N3350, Atom™ E3950, E3940, E3930, DDR3L 1867 MHz, up to 8GB
- DirectX 12.0, OpenGL 4.3, OpenCL 2.0, Triple display: VGA+LVDS/eDP+HDMI/DP*
- Flexible design using integrated multiple I/O: MIOe to approach vertical applications & keep domain knowhow
- 2 Intel i210 GbE, rich I/O: 4COM, 2 SATA, 2 USB 3.0, SMBus/I²C, GPIO full-size Mini PCIe, full-size mSATA
- Supports iManager, RMM and Embedded Software APIs

Software APIs:



Utilities:




Specifications

		Intel Pentium 4200	Intel Celeron N3350	Intel Atom E3950	Intel Atom E3940	Intel Atom E3930
Processor System	CPU	Intel Pentium 4200	Intel Celeron N3350	Intel Atom E3950	Intel Atom E3940	Intel Atom E3930
	Base Frequency	1.1 (Quad-Core)	1.1 (Dual-Core)	1.6 (Quad-Core)	1.6 (Quad-Core)	1.3 (Dual-Core)
	Burst Frequency	2.5	2.4	2	1.8	1.8
	L2 Cache	2	2	2	2	2
Memory	BIOS	AMI UEFI BIOS at 64 Mb				
	Technology	DDR3L 1867 MHZ				
Display	Max. Capacity	8 GB				
	Socket	1 x 204-pin SODIMM				
	Controller	Intel Gen9 Graphic engine				
Ethernet	Graphic Features	DirectX 12.0, OpenGL 4.3, OpenCL 2.0 HW Decode: MPEG2, H.264 (L5.2), VC-1, WMV9, VP8, JPEG/MJPEG, H.265 (HEVC), VP9, MVC				
	VGA	Maximum Resolution up to 1920 x 1200				
	LVDS	48 bit LVDS up to 1.4b (3840 x 2160 @ 30Hz) Supports 3.3/5/12V for VDD power, 5/12V for inverter				
	eDP*	v1.4 4096 x 2160 @ 60Hz				
	HDMI / DP*	HDMI 3840 x 2160 @ 30Hz/ DP1.2a (4096 x 2160 @ 60Hz)				
Audio	Multit-Display	VGA, HDMI/DP*, LVDS/eDP*				
	Speed	10/100/1000Mbps				
WatchDog Timer	Controller	Intel i210				
	Connector	2 RJ45				
Storage	Codec	Realtek ALC888S, High Definition Audio (HD), Line-in, Line out, Mic-in				
	Amplifier*	Optional via MIOe				
Rear I/O	Output	System reset, Programmable counter from 1 ~ 255 minutes/ seconds				
	Speed	2 (2nd SATA is by request), up to 3Gb/s (300 MB/s)				
Internal I/O	mSATA	1 x Full-size				
	Ethernet	2 (10/100/1000Mbps)				
	VGA	1				
	HDMI / DisplayPort*	1				
	USB 2.0	2				
	USB 3.0	2				
	LED	Power, HDD				
Security	DC Jack*	1				
	Serial	2 x RS-232 from COM1/2, 2 x RS-232/422/485 from COM3/4 with auto flow control (ESD protection: air gap ±15kV, contact ±8kV)				
	USB 2.0	2				
	I ² C	1 (Shared with SMBus pin)				
Expansion	SMBus	1				
	GPIO	8-bit (5V tolerance)				
Power	TPM2.0*	Support by request				
	Mini PCIe	1 x Full-size				
	MIOe	SMBus, 3 x USB2.0, LPC, 1 x PCIe x1, line out, DisplayPort*, +5 Vsb/+12 Vsb power, Power On, Rest				
	Power Type	Single 12V DC power input				
	Power Supply Voltage	12V ± 10%				
	Power Consumption (Typical)	N4200: 0.4A @ 12V (4.80W) N3350: 0.4A @ 12V (4.80W)				
Environment	Power Consumption (Max, test in HCT)	N4200: 1.26A @ 12V (15.12W) N3350: 1.29 @ 12V (15.48W)				
	Power Management	ACPI				
Physical Characteristics	Battery	Lithium 3 V / 210 mAh				
	Operating	0 ~ 60 °C (32 ~ 140 °F) (Operating humidity: 40 °C @ 95% RH Non-Condensing)				
Physical Characteristics	Non-Operating	-40 °C ~ 85 °C and 60 °C @ 95% RH Non-Condensing				
	Dimensions (L x W)	146 x 102 mm (5.7" x 4"), same as 3.5"				
	Weight	0.5kg (1.1lb), weight of total package				
Physical Characteristics	Height	Top Side: 19 mm; Bottom Side: 6.8 mm; PCB: 1.6 mm				

* This specification is supported by request

Block Diagram

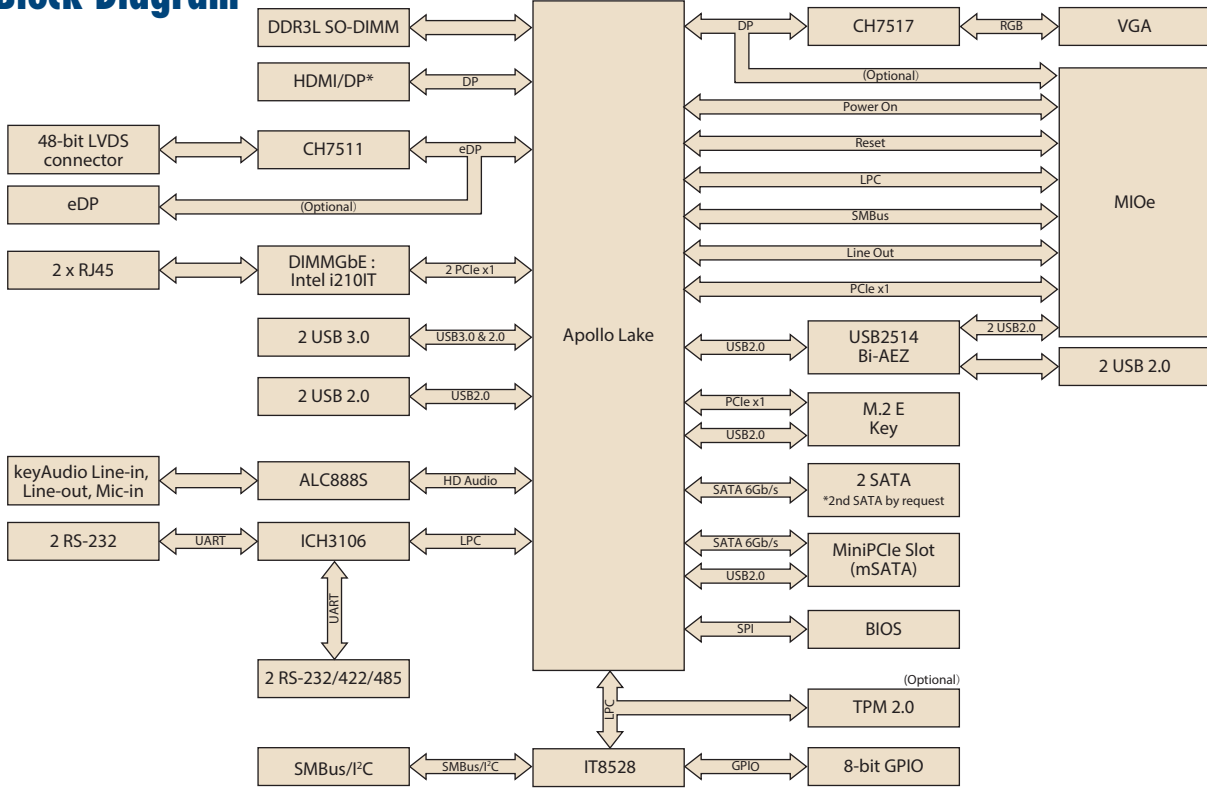

Ordering Information

Part No.	CPU	L2 Cache	Memory	LVDS/ eDP*	VGA	HDMI/ DP*	GbE	Audio	RS-232/ 422/485	RS-232	USB 3.0	USB 2.0	SATA III	M.2 E Key	Mini PCIe	mSATA	MIOe	Power connector	Thermal Solution*	Operating Temp.
MIO-5350N-S2A1E	Intel N4200	2MB	SODIMM	48-bit	Yes	1	2	Yes	2	2	2	4	1	1	Full-size	Full-size	Yes	2x2pin	Passive	0°C-60°C
MIO-5350N-S1A1E	Intel N3350	2MB	SODIMM	48-bit	Yes	1	2	Yes	2	2	2	4	1	1	Full-size	Full-size	Yes	2x2pin	Passive	0°C-60°C

Note: passive=fanless

Packing List

Part No.	Description	Quantity
	MIO-5350 SBC	1
2006535000	Startup Manual	1
1700006291	M Cable SATA 7P/SATA 7P 30cm C-R 180/90	1
1700018785	SATA 35cm power cable	1
1701200220	COM RS-232 Cable 2*10P-2.0/D-SUB 9P (M)*2 22CM	2
1700019584	Audio Cable 2*5P-2.0/JACK*3 20cm	1
9689000002	mini Jumper pack	1

Optional Accessories

Part No.	Description
1757003934	Adapter 100-240V 60W 12V 5A W/O PFC
1703100264	Internal 1 port USB cable 22.5cm

Embedded OS/API

Embedded OS/API	Part No.	Description
Win10	2070015276	64bit (ENG)
WEC2013		
Linux		Ubuntu 14.04
VxWorks		6.9.3.3
Android		Kit Kat 4.4
Software API		iManager 2.0

Rear I/O View



Our company network supports you worldwide with offices in Germany, Austria, Switzerland, Great Britain and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG
Lechwiesenstr. 9
86899 Landsberg am Lech

Phone: +49 8191 91172-0
E-Mail: sales@forteca.de
Internet: www.forteca.de

Fortec Group Members

Austria



FORTEC Elektronik AG
Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: office@fortec.at
Internet: www.fortec.at

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF

Phone: +44 1634 672755
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com