
Datasheet

Advantech


PCM-3365

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

PCM-3365

Intel® Atom™ E3825 / E3845 & Celeron® N2930, PC/104-Plus SBC, ISA, VGA, HDMI/DVI, LVDS, 6 USB, mSATA or Onboard Flash

NEW

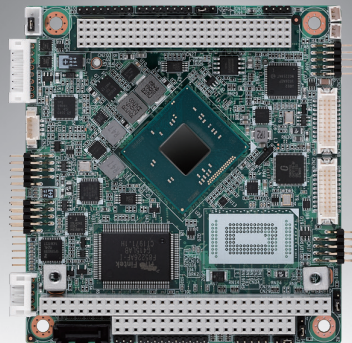

susiAccess CE FCC

Features

- Intel® Atom™ E3825/E3845 & Celeron® N2930, DDR3L-1066/1333MHz SODIMM up to 8GB
- DirectX11, OpenGL3.2, OpenCL1.1, 3 independent display: VGA+LVDS/HDMI+LVDS/DVI+LVDS/VGA+LVDS
- Support PC/104-Plus expansion
- Rich I/O: 1 GbE, 3 COM, SATA, 6 USB2.0, SMBus/I2C, GPIO, full-size Mini PCIe/full-size mSATA
- Supports SUSIAccess and Embedded Software APIs

Software APIs:



Utilities:




Specifications

		Intel Celeron N2930	Intel Atom E3825	Intel Atom E3845
Processor System	CPU	Intel Celeron N2930	Intel Atom E3825	Intel Atom E3845
	Base Frequency	1.83 GHz (Quad-Core)	1.33 GHz (Dual-Core)	1.91 GHz (Quad-Core)
	Max Turbo Frequency	2.16 GHz	-	-
	L2 Cache	2MB	1MB	2MB
Memory	BIOS	AMI UEFI BIOS at 64 Mb		
	Technology	DDR3L 1333 MHz	DDR3L 1066 MHz	DDR3L 1333 MHz
Display	Max. Capacity	8 GB		
	Socket	1 x 204-pin SODIMM		
	Controller	Intel Gen7 graphic engine		
	Processor Graphics	DirectX11, OpenGL3.2, OpenCL1.1 Full HW acceleration, decode: H.264, MPEG2/4, VC-1, WMV9. Encode: H.264, MPEG2		
	VGA	2560 x 1600 at 60Hz		
	LVDS	24-bit LVDS up to WUXGA 1920 x 1200 at 60Hz Supports single channel 24-bit LVDS up to 1440 x 900 at 60Hz		
Ethernet	HDMI / DVI	HDMI 1.4a for HD video playback, 1080P at 60Hz, up to 1920 x 1080 (Cable is optional)		
	Mult-Display	VGA + LVDS, VGA + HDMI/DVI, HDMI/DVI + LVDS		
WatchDog Timer	Speed	10/100/1000Mbps		
	Controller	Intel I210		
	Connector	Pin Header		
Storage	Speed	Output System reset, Programmable counter from 1 ~ 255 minutes/ seconds		
	SATA	1, up to 3Gb/s (300 MB/s)		
	mSATA	1 x Full-size (SATA signal shared with Onboard flash)		
Internal I/O	Onboard Flash*	16GB/32GB/64GB		
	Serial	1 RS-232/422/485 from COM 1, 2 RS-232 from COM2/3 (ESD protection: Air gap ±15kV, Contact ±8kV)		
	USB2.0	6		
	I2C	1 (Shared with SMBus pin)		
	SMBus	1		
	GPIO	8-bit		
Expansion	Mini PCIe	1 x Full-size (default supports SATA and USB, PCIe is supported by request)		
	PC/104	PC/104 Expansion, Memory and DMA are not supported		
	PCI-104	PCI-104 Expansion		
Power	Power Type	AT/ATX Support PC104 plus power module*		
	Power Supply Voltage	5V ± 5%		
	Power Consumption (Typical)	E3825: 0.877A@+5V, 0.006A@+12V, 0.003A@+5VSB (4.472W) E3845: 0.923@+5V, 0.007A@+12V, 0.004A@+5VSB (4.719W) N2930: 0.866A@+5V, 0.006A@+12V, 0.003A@+5VSB (4.417W)		
	Power Consumption (Max, test in HCT)	E3825: 1.107A@+5V, 0.008A@+12V, 0.008A@+5VSB (5.671W) E3845: 1.493@+5V, 0.008A@+12V, 0.025A@+5VSB (7.686W) N2930: 1.331A@+5V, 0.009A@+12V, 0.016A@+5VSB (6.843W)		
	Power Management	ACPI		
Environment	Battery	Lithium 3 V / 210 mA		
	Operational	0 ~ 60° C with 0.7m/s air flow (32 ~ 140° F) (Operational humidity: 40° C @ 95% RH Non-Condensing)		
Physical Characteristics	Non-Operational	-40° C ~ 85° C and 60° C @ 95% RH Non-Condensing		
	Dimensions (L x W)	96 x 90 mm (3.8" x 3.5")		
	Weight	0.735 kg (1.62 lb) (with heat-sink)		
	Height	Top side: 14.4mm (N2930, E3825 standard), 19.4mm (E3845 & E3825 extend temp.); Bottom side: 7.8mm, PCB: 1.6mm		

* The specification is supported by request

Block Diagram

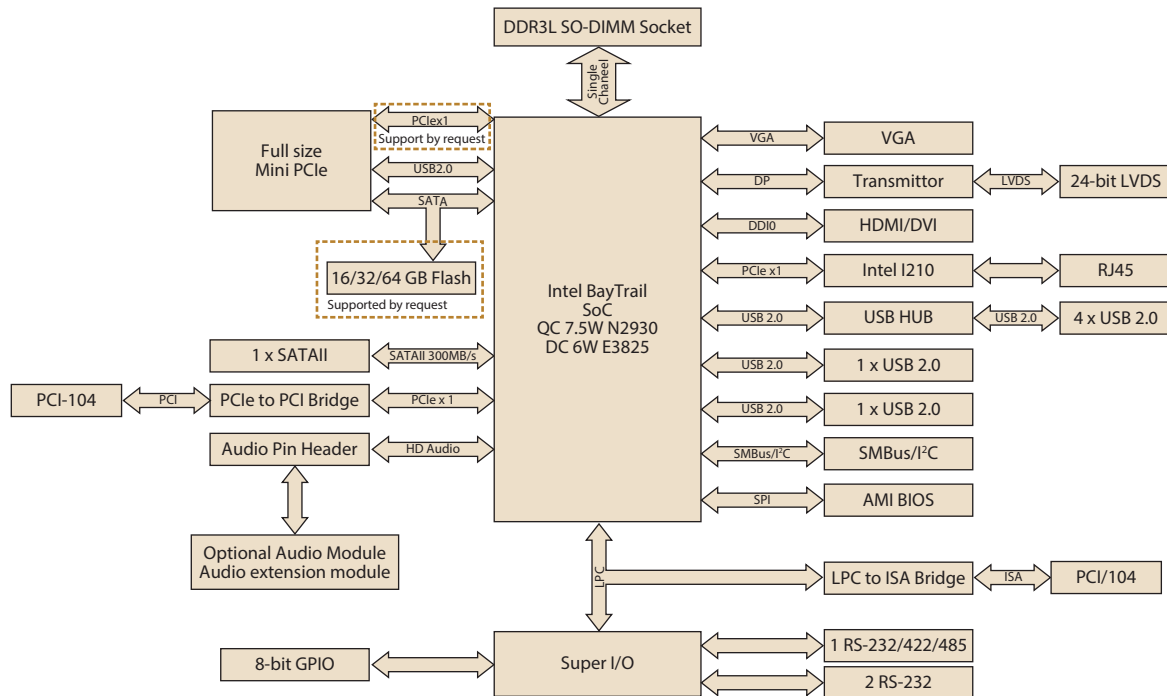

Ordering Information

Part No.	CPU	L2 Cache	Memory	VGA	HDMI/DVI	LVDS	USB2.0	SATA	GbE	COM	PCI-104	PC/104	Full-size miniPCle	Thermal solution	Operating Temp
PCM-3365E-S3A1E	E3825	1MB	SODIMM	Yes	Yes	24-bit	6	1	1	3	Yes	Yes	Yes	Passive	0 – 60
PCM-3365EW-S3A1E	E3825	1MB	SODIMM	Yes	Yes	24-bit	6	1	1	3	Yes	Yes	Yes	Passive	-40 – 85
PCM-3365EW-S9A1E	E3845	2MB	SODIMM	Yes	Yes	24-bit	6	1	1	3	Yes	Yes	Yes	Passive	-40 – 85
PCM-3365N-S8A1E	N2930	2MB	SODIMM	Yes	Yes	24-bit	6	1	1	3	Yes	Yes	Yes	Passive	0 – 60

Packing List

PN	Description	Quantity
	PCM-3365 SBC	1
	Startup manual	1
1700002332	ATX power cable 20P-13P/8P/3P/3P 13 cm	1
1700003491	AT power cable 1 x 8P-2.0/B4P-5.08 x 2 15 cm	1
1700017863	LAN cable RJ-45/2 x 5P-2.0 15 cm	1
1700071000	SATA data cable 7p 100 cm	1
1700022749-11	SATA power cable B4P-5.08/SATA 15P 10 cm	1
1703100260	USB cable 2 ports 2.0 mm pitch w/ bracket 26 cm	3
1701200220	RS-232 x 2 ports 2.0 mm 22 cm	1
1700019414	RS-232/422/485 30cm 1 prot	1
1700000898	VGA cable D-SUB 15P(F)/12P-1.25 mm15 cm	1
9689000002	mini Jumper pack	1
1960073365T001	Heatsink for E3845 & E3825 extend temp. (77.98 x 79.66 x 17.58 mm)	1
1960071977T001	Heatsink for E3825 standard/N2930 (79.66 x 77.98 x 12 mm)	1

Optional Accessories

Part No.	Description
1960075183T001	Heat spreader of PCM-3365 (79.66 x 77.98 x 10.68 mm)
1653130421	PCI-104 connector 120-pin (Long pin)
165313222B	PC/104 connector 64-pin (Long pin)
165312022B	PC/104 connector 40-pin (Long pin)
1700025501-01	15cm DVI cable
1700025492-01	10cm HDMI cable
PCA-AUDIO-HDB1E	Audio extension module
1700025491-01	30cm audio cable connecting PCM-3365 and audio extension module

Embedded OS/API

Windows 10	Part No.	Description
WES8	TBC	
WES7	2070014273	WES7E x64
WEC7	TBC	
Linux		Kernel 3.x
VxWorks		6.9.3.3
Android		Kit Kat 4.4
Software API		iManager (SUSI 4.0)

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, Great Britain and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG
Lechwiesenstr. 9
86899 Landsberg am Lech

Phone: +49 8191 91172-0
E-Mail: sales@forteca.de
Internet: www.forteca.de

Fortec Group Members

Austria



FORTEC Elektronik AG
Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: office@fortec.at
Internet: www.fortec.at

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF

Phone: +44 1634 672755
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com