
Datasheet

ADVANTECH


PCM-9366

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

PCM-9366

Intel® Pentium N4200 Celeron N3350 & Atom™ E3950/E3940/E3930, DDR3L, HDMI, VGA, 48-bit LVDS/*eDP, 2GbE, M.2 Key E, Mini PCie/mSATA, M.2 Key E, wide range power input, iManager

NEW

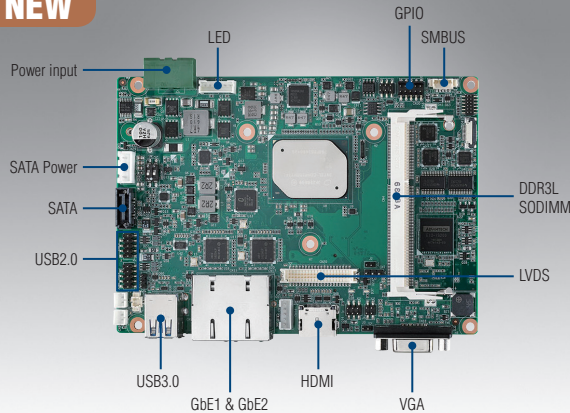

iManager susiAccess CE FCC

Features

- Intel® Pentium N4200 Celeron N3350 & Atom™ E3950/E3940/E3930, 1 x DDR3L-1600/1333 SODIMM support up to 8 GB
- DirectX11, OpenGL3.2, OpenCL1.2, multi-display: VGA+LVDS/eDP+ HDMI/DP*
- Support 9-36V wide range power input
- 2 GbE, rich I/O: 4COM, SATA, USB3.0, SMBus/I²C, 2 8bit GPIO, 2 CANBUS, M.2 key E, full-size mSATA
- Supports iManager, SUSIAccess and Embedded Software APIs

Software APIs:



Utilities:




Specifications

Processor System	CPU	Intel Pentium 4200	Intel Celeron N3350	Intel Atom E3950	Intel Atom E3940	Intel Atom E3930
	Base Frequency	1.1 (Quad-Core)	1.1 (Dual-Core)	1.6 (Quad-Core)	1.6 (Quad-Core)	1.3 (Dual-Core)
	Max Turbo Frequency	2.4 GHz	2 GHz	1.8 GHz	1.8 GHz	
	L2 Cache	2MB	2MB	2MB	2MB	2MB
	BIOS	AMI UEFI BIOS at 64 Mb				
Memory	Technology	DDR3L 1867 MHz				
	Max. Capacity	8 GB				
	Socket	1 x 204-pin SODIMM				
Display	Controller	Intel Gen9 graphic engine				
	Processor Graphics	DirectX11, OpenGL3.2, OpenCL1.2 Full HW acceleration, decode: H.264, MPEG2/4, VC-1, WMV9. Encode: H.264, MPEG2				
	VGA	2560 x 1600 at 60Hz				
	LVDS	48-bit dual LVDS up to WUXGA 1920 x 1200 at 60Hz, the 2nd LVDS is supported by request Supports 3.3/5/12V for VDD power, 1A@5V/12V for inverter				
	HDMI	HDMI 1.4a for HD video playback, 1080P at 60Hz				
Ethernet	Mult-Display	VGA + HDMI+ LVDS/eDP*				
	Speed	10/100/1000Mbps				
	Controller	Intel i210				
Audio	Connector	2 RJ45				
	Codec	Realtek ALC888S, High Definition Audio (HD), Line-in, Line out, Mic-in				
WatchDog Timer		Output System reset, Programmable counter from 1 ~ 255 minutes/ seconds				
Storage	SATA	1, up to 6Gb/s (600MB/s)				
	mSATA	1 x Full-size				
Rear I/O	Ethernet	2 (10/100/1000Mbps)				
	VGA	1				
	HDMI	1				
	USB 3.0	2				
Internal I/O	Serial	2 x RS-232/422/485 from COM1/2, 2 x RS-232 from COM3/4 with auto flow control (ESD protection: air gap ±15kV, contact ±8kV)				
	USB2.0	4				
	I ² C	1 (Shared with SMBus pin)				
	SMBus	1				
	GPIO	2 x 8-bit				
Expansion	Mini PCie	1 x Full size*				
	M.2	1 x M.2 Key E				
Power	Power Type	9-36V DC power input				
	Power Consumption (Typical)	TBD				
	Power Consumption (Max, test in HCT)	TBD				
	Power Management	ACPI				
Environment	Battery	Lithium 3 V / 210 mA				
	Operational	0 ~ 60° C with 0.7m/s air flow (32 ~ 140° F) (Operational humidity: 40° C @ 95% RH Non-Condensing)				
Physical Characteristics	Non-Operational	-40° C ~ 85° C and 60° C @ 95% RH Non-Condensing				
	Dimensions (L x W)	146 x 102 mm (5.7" x 4"), same as 3.5"				
	Weight	0.54kg (1.19lb), weight of total package				
	Height	Top Side: 19.5 mm; Bottom Side: 7.8 mm; PCB: 1.6 mm				

* The specification is supported by request

Block Diagram

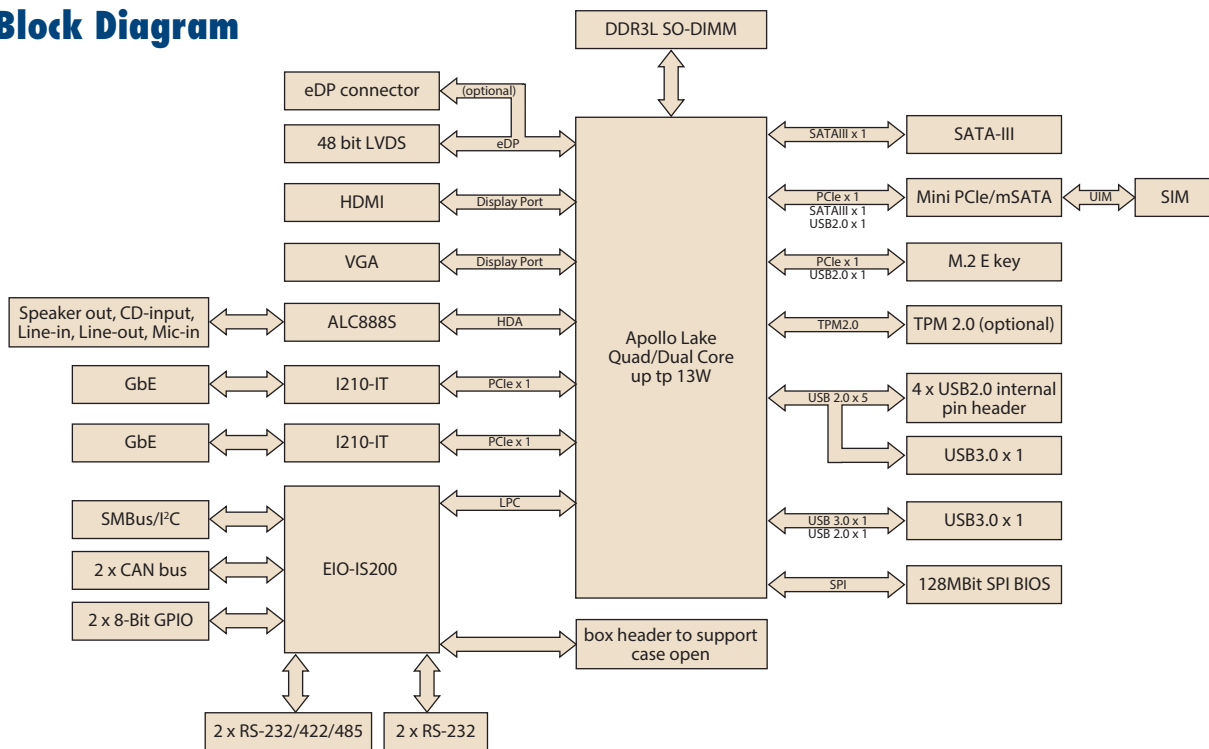

Note1: Supported by request

Ordering Information

Part No.	CPU	Memory	HDMI	LVDS	VGA	GbE	Audio	RS-232/422/485	RS-232	USB 3.0	USB 2.0	SATA III	M.2 Key E	Mini PCIe	mSATA	CANBUS	Power connector	Thermal Solution*	Operating Temp.
PCM-9366N series	Intel N4200/ N3350 6W	SODIMM	1	48-bit	Yes	2	Yes	2	2	4	4	1	1	Full-size	Full-size	2	2P Phoenix power connector	Passive	0 ~ 60° C
PCM-9366E series	Intel E3950/40/30 (12W/9W/6W)	SODIMM	1	48-bit	Yes	2	Yes	2	2	2	4	1	1	Full-size	Full-size	2	2P Phoenix power connector	Passive	0 ~ 60° C

Note: Passive=fanless; Active=with fan

Packing List

Part No.	Description	Quantity
	PCM-9366 SBC	1
	Startup Manual	1
1701200220	RS-232 COM3/4 cable, F Cable 2*10P-2.0/D-SUB 9P(M)*2 22CM	1
1700018785	SATA 35cm power cable	1
1700019414	RS-232 COM2 Cable D-SUB 9P(M)/2*5P-2.0 30cm	1
1700018730	USB Cable 2*5P-2.0/USB-A(F)*2 25CM F/9	2
1700008941	M Cable SATA 7P/SATA 7P 32CM C=R 180/180D W/Lock	1
1700019584	Audio Cable 2*5P-2.0/JACK*3 20cm	1
9689000002	mini Jumper pack	1

Optional Accessories

Part No.	Description
TBD	

Embedded OS/API

Embedded OS/API	Part No.	Description
WIN10	TBD	
Linux		
VxWorks		
Android		
Software API		

Rear I/O View



Our company network supports you worldwide with offices in Germany, Austria, Switzerland, Great Britain and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG
Lechwiesenstr. 9
86899 Landsberg am Lech

Phone: +49 8191 91172-0
E-Mail: sales@forteca.de
Internet: www.forteca.de

Fortec Group Members

Austria



FORTEC Elektronik AG
Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: office@fortec.at
Internet: www.fortec.at

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF

Phone: +44 1634 672755
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com