


# SRG-IMX8P

Standard IoT Gateway with ARM i.MX8M Plus Quad-Core Cortex-A53 1.6GHz Processor

Front View

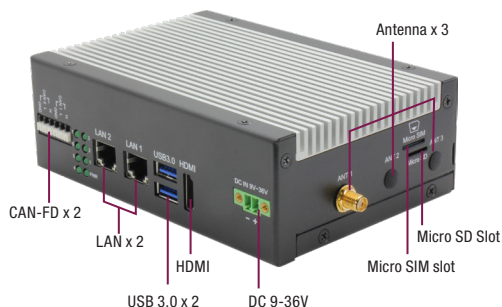

Rear View



With Antennas installed



Pinout	PIN	CAN1 Definition	CAN2 Definition
	1	H	H
	2	L	L
	3	GND	GND

Pinout	PIN	COM P1 Definition	COM P2 Definition
	1	DCD1	DCD2
	2	RXD1	RXD2
	3	TXD1	TXD2
	4	DTR1	DTR2
	5	RTS1	RTS2
	6	CTS1	CTS2
	7	GND	GND

## Features

- i.MX8M Plus Quad Cortex-A53 1.6 GHz RISC Processor
- Onboard DDR4L 2GB / eMMC 16GB (Optional 4GB RAM/ eMMC 32GB)
- USB 3.0 x 2
- Gigabit Ethernet port x 2
- CAN-FD x 2CH
- Mini PCIe connector (For RF Module) x 2
- Micro SD Card Slot x 1
- Support RTC, TPM 2.0
- Wide Voltage DC9V-36V
- Wide Temperature -20 °C ~ 70 °C
- Pre-Install Linux Debian
- Supports Modbus/MQTT Library (by request)



## Specifications


System	
Processor	ARM NXP i.MX8M Plus Quad-Core Cortex-A53 1.6GHz Processor (NPU Optional)
Memory	Onboard DDR4L 2GB (Optional 4GB)
Storage	eMMC 16GB (Optional 32GB)
Real Time Clock	RTC x 1, with 3V CR2032 Lithium battery
Security	TPM 2.0
Indicators	Programmable LED control x 7
Cellular	Mini PCIe Connector x 1 (USB signal)
Wireless Lan	Mini PCIe Connector x 1 (USB signal)
Operating System	Debian 10
Support Protocol	Modbus / MQTT Library (by request)
I/O Interfaces	
Serial Port	RS-232/422/485 switchable x 2, Phoenix Connector
Ethernet	Gigabit Ethernet x 2, RJ-45
USB	USB 3.0, Type-A x 2
ADC	—
DI/DO	—
CAN Bus	CAN-FD x 2 CH, Phoenix Connector
Display	HDMI x1 (Output)
Power Connector	2 Pin 3.81mm Pitch Phoenix Connector
Debug Port	Micro USB x 1
Expansion Slot	SIM card slot x 1 Micro SD slot x 1
Other Interface	—
Power Supply	
Power Requirement	DC 9-36V
Power Consumption	9.36W (Full Loading)
MTBF (Hours)	479,374
Environmental and Mechanical	
Dimension	5.54" x 3.86" x 1.89" (140.76 x 98.2 x 48 mm)
Weight	2.6lb (1.18kg)
Mount Options	Wall Mount, Din Rail (Optional)
Operation Temperature	-4 °F ~ 158 °F (-20 °C ~ 70 °C)
Storage Temperature	-40 °F ~ 176 °F (-40 °C ~ 80 °C)
Operation Humidity	10% ~ 95% relative humidity, non-condensing

## Packing List

- SRG-IMX8P

## Dimension

Unit: mm

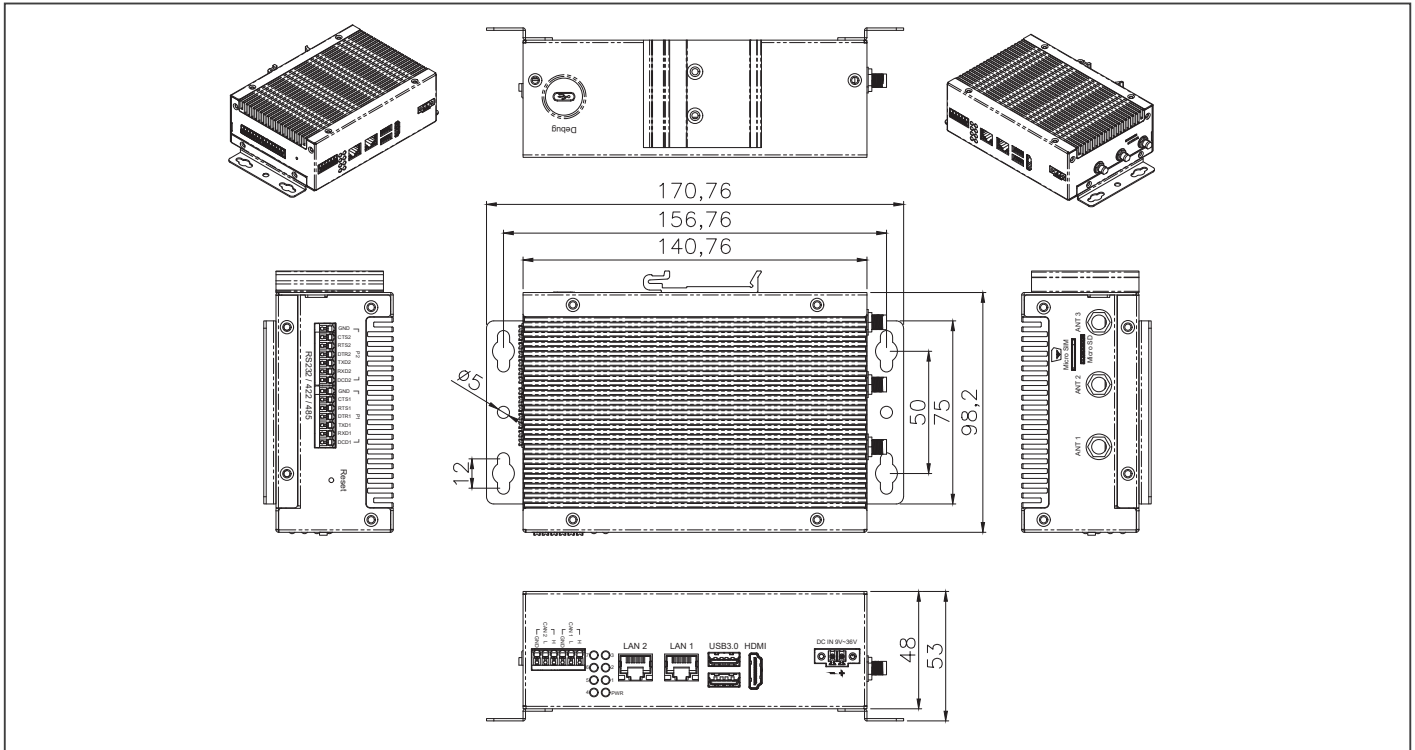

## Ordering Information

Part Number	CPU	NPU	Memory	Thermal	Ports	Storage	LAN	USB	Expansion slot	Power	Operation Temp.	Others
SRG-IMX8P-A10-0216	ARM NXP i.MX8M Plus Quad-Core Cortex-A53 1.6GHz Processor	N/A	Onboard LPDDR4 1866MHz 2GB	Fanless	RS-232/422/485 x 2, Phoenix HDMI x 1 (Output) CAN-FD x 2 CH, Phoenix	eMMC 16GB, MicroSD x1	GbE x 2	USB 3.0 x 2	Mini PCIe slot x 2 SIM card socket x 1	DC 9-36V	-20°C ~ 70°C @ 0.5 m/s airflow	3G/4G LTE module Wifi/BT Module (optional)
SRG-IMX8P-A10-0432	ARM NXP i.MX8M Plus Quad-Core Cortex-A53 1.6GHz Processor	1X	Onboard LPDDR4 1866MHz 4GB	Fanless	RS-232/422/485 x 2, Phoenix HDMI x 1 (Output) CAN-FD x 2 CH, Phoenix	eMMC 32GB, MicroSD x1	GbE x 2	USB 3.0 x 2	Mini PCIe slot x 2 SIM card socket x 1	DC 9-36V	-20°C ~ 70°C @ 0.5 m/s airflow	3G/4G LTE module Wifi/BT Module (optional)

## Installation Scenario



DIN-Rail Mount Illustration



Wallmount Illustration

## Optional Accessories

- 9741EG25G0**  
 PCIe mini card. 4G LTE. module kit. Global Band W/ SIM holder. W/Cable & antenna. Quectel. EG25-G
- 9741EC25E0**  
 PCIe mini card.4G LTE. module kit. W/Cable & Antenna. Quectel. EC25-E
- 9741236A00**  
 Mini card Wifi Kit.802.11ac/a/b/g/n. BT4.2. W/ Cable&Antenna.SparkLan.WPET-236ACN(BT)
- 1255300611**  
 Power Adapter.DC.100/240V.12V.5A.60W.2P Phoenix P=3.81mm.
- 1702031802**  
 POWER CORD.3P-250V 10A.1.8M.EU.
- 170203180J**  
 POWER CORD.3P-250V 13A.1.8M.IUK
- 1702031811**  
 POWER CORD.3P-125V 10A.1.8M.TWN
- 170203180E**  
 POWER CORD. 3P-125V 7A.1.8M.JPN
- 9651IMX802**  
 DIN rail kit. SRG-IMX8P series
- 9651IMX801**  
 Wall mount kit.SRG-IMX8P series