

OUR GLOBAL
COMPETENCE
CENTRES

 APOLLO DISPLAY
TECHNOLOGIES



 DISTEC



 DISPLAY
TECHNOLOGY



Datasheet

Kyocera

TCG104VGLCCANN-AN41

KY-01-042

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

SPEC

Spec No.	TQ3C-8EAF0-E1YAG67-00
Date	January 22, 2018

TYPE : TCG104VGLCCANN-AN41
< 10.4 inch VGA transmissive color TFT with LED backlight >

CONTENTS

1. Application
2. Construction and outline
3. Mechanical specifications
4. Absolute maximum ratings
5. Electrical characteristics
6. Optical characteristics
7. Interface signals
8. Input timing characteristics
9. Lot number identification
10. Warranty
11. Precautions for use
12. Reliability test data
13. Outline drawing



KYOCERA DISPLAY CORPORATION

Original Issue Date	Designed by: Engineering dept.			Confirmed by: QA dept.	
	Prepared	Checked	Approved	Checked	Approved
January 22, 2018	S. Mori	K. Edo	G. Matsumoto	H. Sumi	K. Sugano

Spec No.	Part No.	Page
TQ3C-8EAF0-E1YAG67-00	TCG104VGLCCANN-AN41	-

Warning

1. This Kyocera LCD module has been specifically designed for use only in electronic devices and industrial machines in the area of audio control, office automation, industrial control, home appliances, etc. The module should not be used in applications where the highest level of safety and reliability are required and module failure or malfunction of such module results in physical harm or loss of life, as well as enormous damage or loss. Such fields of applications include, without limitation, medical, aerospace, communications infrastructure, atomic energy control. Kyocera expressly disclaims any and all liability resulting in any way to the use of the module in such applications.

2. Customer agrees to indemnify, defend and hold Kyocera harmless from and against any and all actions, claims, damages, liabilities, awards, costs, and expenses, including legal expenses, resulting from or arising out of Customer's use, or sale for use, or Kyocera modules in applications.

Caution

1. Kyocera shall have the right, which Customer hereby acknowledges, to immediately scrap or destroy tooling for Kyocera modules for which no Purchase Orders have been received from the Customer in a two-year period.

Spec No. TQ3C-8EAF0-E1YAG67-00	Part No. TCG104VGLCCANN-AN41	Page -
-----------------------------------	---------------------------------	-----------

Revision record

Date	Designed by : Engineering dept.			Confirmed by : QA dept.	
	Prepared	Checked	Approved	Checked	Approved
Rev.No.	Date	Page	Descriptions		

Spec No. TQ3C-8EAF0-E1YAG67-00	Part No. TCG104VGLCCANN-AN41	Page 1
-----------------------------------	---------------------------------	-----------

1. Application

This document defines the specification of TCG104VGLCCANN-AN41. (RoHS Compliant)

2. Construction and outline

LCD	: Transmissive color dot matrix type TFT
Backlight system	: LED
Polarizer	: Anti-Glare treatment
Additional circuit	: Timing controller, Power supply (3.3V input) (with constant current circuit for LED Backlight)

3. Mechanical specifications

Item	Specification	Unit
Outline dimensions 1)	230(W)×180.2(H)×(10.5)(D)	mm
Active area	211.2(W)×158.4(H) (26.4cm/10.4 inch(Diagonal))	mm
Dot format	640×(R,G,B)(W)×480(H)	dot
Dot pitch	0.11(W)×0.33(H)	mm
Base color 2)	Normally White	-
Mass	500	g

- 1) Projection not included. Please refer to outline for details.
- 2) Due to the characteristics of the LCD material, the color varies with environmental temperature.

Spec No. TQ3C-8EAF0-E1YAG67-00	Part No. TCG104VGLCCANN-AN41	Page 2
-----------------------------------	---------------------------------	-----------

4. Absolute maximum ratings

4-1. Electrical absolute maximum ratings

Item	Symbol	Min.	Max.	Unit
Supply voltage(+3.3V)	V _{DD}	0	4.0	V
Supply voltage(+24V)	V _{IN}	-0.3	26	V
Input signal voltage	V _{I1}	-0.3	VDD+0.3	V
	V _{I2}	-0.3	VDD+0.3	V
	V _{I3}	-0.3	14	V

- 1) SC
- 2) RxIN0-/+, RxIN1-/+, RxIN2-/+, RxIN3-/+, CK IN-/+

BLBRT, BLEN

4-2. Environmental absolute maximum ratings

Item	Symbol	Min.	Max.	Unit
Operating temperature (Ambient) 1)	T _{OP}	-30	80	°C
Operating temperature (Panel) 2)	T _{OP}	-30	80	°C
Storage temperature 3)	T _{STO}	-30	80	°C
Operating humidity 4)	H _{OP}	10	5)	%RH
Storage humidity 4)	H _{STO}	10	5)	%RH
Vibration	-	6)	6)	-
Shock	-	7)	7)	-

- 1) Operating temperature means a temperature which operation shall be guaranteed. Since display performance is evaluated at 25°C, another temperature range should be confirmed.
- 2) Panel / Backboard surface temperature (all the surface)
- 3) Temp. = -30°C < 48h , Temp. = 80°C < 168h

Store LCD at normal temperature/humidity. Keep them free from vibration and shock.

An LCD that is kept at a low or a high temperature for a long time can be defective due to other conditions, even if the low or high temperature satisfies the standard.

(Please refer to "Precautions for Use" for details.)
- 4) Non-condensing
- 5) Temp. ≤ 40°C, 85%RH Max.

Temp. > 40°C, Absolute humidity shall be less than 85%RH at 40°C.
- 6)

Frequency	10~55 Hz	Acceleration value (0.3~9 m/s ²)
Vibration width	0.15mm	
Interval	10-55-10 Hz	1 minutes

2 hours in each direction X, Y, Z (6 hours total)

EIAJ ED-2531

- 7) Acceleration: 490 m/s², Pulse width: 11 ms

3 times in each direction: ±X, ±Y, ±Z

EIAJ ED-2531

Spec No. TQ3C-8EAF0-E1YAG67-00	Part No. TCG104VGLCCANN-AN41	Page 3
-----------------------------------	---------------------------------	-----------

5. Electrical characteristics

5-1. LCD

Temp. = -30~80°C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage 1)	V _{DD}	-	3.0	3.3	3.6	V
Current consumption	I _{DD}	2)	-	210	270	mA
Permissive input ripple voltage	V _{RP}	V _{DD} =3.3V	-	-	100	mVp-p
Input signal voltage 3)	V _{IL}	"Low" level	0	-	0.2VDD	V
	V _{IH}	"High" level	0.8VDD	-	V _{DD}	V
Input reek current 3)	I _{OL}	V _{I3} =0V	-10	-	10	μ A
	I _{OH}	V _{I3} =3.3V	-	-	350	μ A
Differential input voltage 4)	V _{ID}	-	100	-	600	mV
Differential input threshold voltage 4)	V _{TL}	"Low" level	-100	-	-	mV
	V _{TH}	"High" level	-	-	100	mV
LVDS Common mode voltage 4)	V _{ICM}		V _{ID} /2	1.2	2.4- V _{ID} /2	
Terminator	R ₁	-	-	100	-	Ω

1) V_{DD}-turn-on conditions

0 < t1 ≤ 20ms
0 < t2 ≤ 50ms
0 < t3 ≤ 1s


2) Display pattern:

V_{DD} = 3.3V, Temp. = 25°C

3) Input signal : SC

M407011

- 4) Input signal : RxIN3+, RxIN3-, RxIN2+, RxIN2-, RxIN1+, RxIN1-, RxIN0+, RxIN0-
 CK IN+, CK IN-

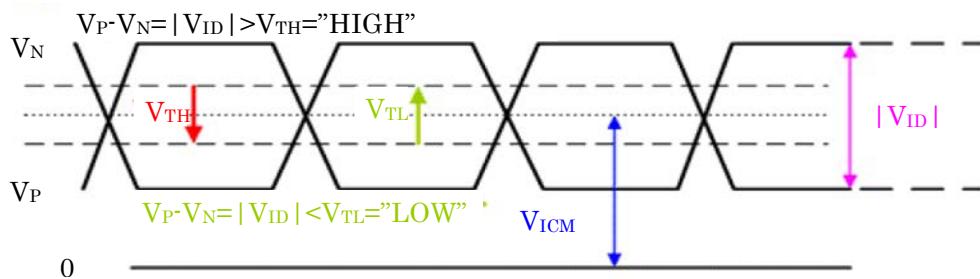

5-2. Constant current circuit for LED Backlight

Temp. = -30~80°C


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage	1) V_{IN}	-	22.8	24.0	25.2	V
Current consumption	I_{IN}	2)	-	(250)	(390)	mA
Permissive input ripple voltage	V_{RP_BL}	$V_{IN}=24.0V$	-	-	100	mVp·p
BLBRT Input signal voltage	V_{IL_BLBRT}	"Low" level	0	-	0.8	V
	V_{IH_BLBRT}	"High" level	2.3	-	13.2	V
BLBRT Input pull-up resistance	R_{IN_BLBRT}	$V_{IN}=24.0V$	-	10	-	kΩ
		$V_{IN}=0V$	-	1.6	-	kΩ
BLEN Input signal voltage	V_{IL_BLEN}	"Low" level	0	-	0.8	V
	V_{IH_BLEN}	"High" level	2.3	-	13.2	V
BLEN Input pull-up resistance	R_{IN_BLEN}	$V_{IN}=24.0V$	-	10	-	kΩ
		$V_{IN}=0V$	-	1.6	-	kΩ
PWM Frequency	3) f_{PWM}	-	200		10k	Hz
PWM Duty ratio	3) D_{PWM}	$f_{PWM}=200Hz$	1		100	%
		$f_{PWM}=2kHz$	10	-	100	%
		$f_{PWM}=10kHz$	50	-	100	%
Operating life time	4), 5), 6) T	Temp.=25°C	-	70,000	-	h
		Temp.=70°C	-	53,000	-	h

1) V_{IN} -turn-on conditions

2) $V_{IN} = 24V$, Temp. = 25°C, $D_{PWM} = (100\%)$

Spec No. TQ3C-8EAF0-E1YAG67-00	Part No. TCG104VGLCCANN-AN41	Page 5
-----------------------------------	---------------------------------	-----------

3) PWM Timing Diagram

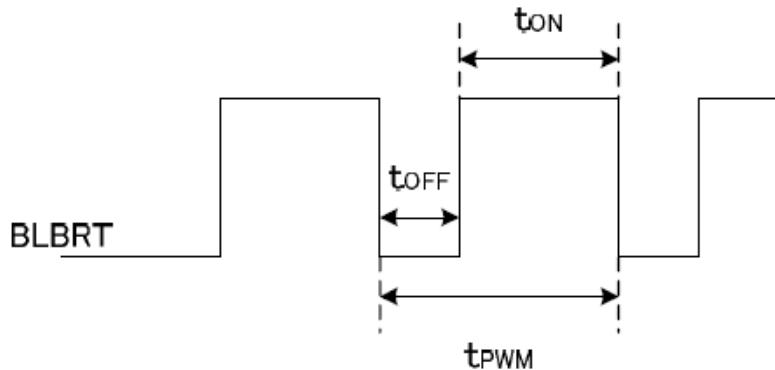

$t_{ON}, t_{OFF} \geq 50 \mu s.$

In case of lower frequency, the deterioration of the display quality, flicker etc., may occur.

- 4) When brightness decrease 50% of minimum brightness.
The average life of a LED will decrease when the LCD is operating at higher temperatures.
- 5) Life time is estimated data.(Condition : IF=78mA, Duty=90%, Ta=25°C in chamber).
- 6) Design value of LED

Spec No. TQ3C-8EAF0-E1YAG67-00	Part No. TCG104VGLCCANN-AN41	Page 6
-----------------------------------	---------------------------------	-----------

6. Optical characteristics

Measuring spot = ϕ 6.0mm, Temp. = 25°C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Response time	Rise τ_r	$\theta = \phi = 0^\circ$	-	10	-	ms
	Down τ_d	$\theta = \phi = 0^\circ$	-	20	-	ms
Viewing angle range View direction : 6 o'clock (Gray inversion)	θ UPPER	CR ≥ 10	-	60	-	deg.
	θ LOWER		-	70	-	
	ϕ LEFT		-	70	-	
	ϕ RIGHT		-	70	-	
Contrast ratio	CR	$\theta = \phi = 0^\circ$	350	500	-	-
Brightness	L	IF=78mA/Line Duty=100%	(750)	(1,100)	-	cd/m ²
		IF=78mA/Line Duty=90%	(700)	(1,000)	-	cd/m ²
Chromaticity coordinates	Red	x	$\theta = \phi = 0^\circ$	(0.556)	(0.606)	(0.656)
		y		(0.289)	(0.339)	(0.389)
	Green	x	$\theta = \phi = 0^\circ$	(0.286)	(0.336)	(0.386)
		y		(0.503)	(0.553)	(0.603)
	Blue	x	$\theta = \phi = 0^\circ$	(0.102)	(0.152)	(0.202)
		y		(0.067)	(0.117)	(0.167)
	White	x	$\theta = \phi = 0^\circ$	(0.256)	(0.306)	(0.356)
		y		(0.281)	(0.331)	(0.381)

6-1. Definition of contrast ratio


$$\text{CR(Contrast ratio)} = \frac{\text{Brightness with all pixels "White"}}{\text{Brightness with all pixels "Black"}}$$

6-2. Definition of response time


The graph illustrates the brightness response of a liquid crystal panel. It shows two cycles of brightness change between White and Black states. The Y-axis represents Brightness, with markers at 100%, 90%, and 10%. The X-axis represents time. During the transition from Black to White (the first cycle), the brightness rises from 10% to 90% in a time interval labeled τ_r . During the transition from White to Black (the second cycle), the brightness falls from 90% back down to 10% in a time interval labeled τ_d .

M407011

6-3. Definition of viewing angle

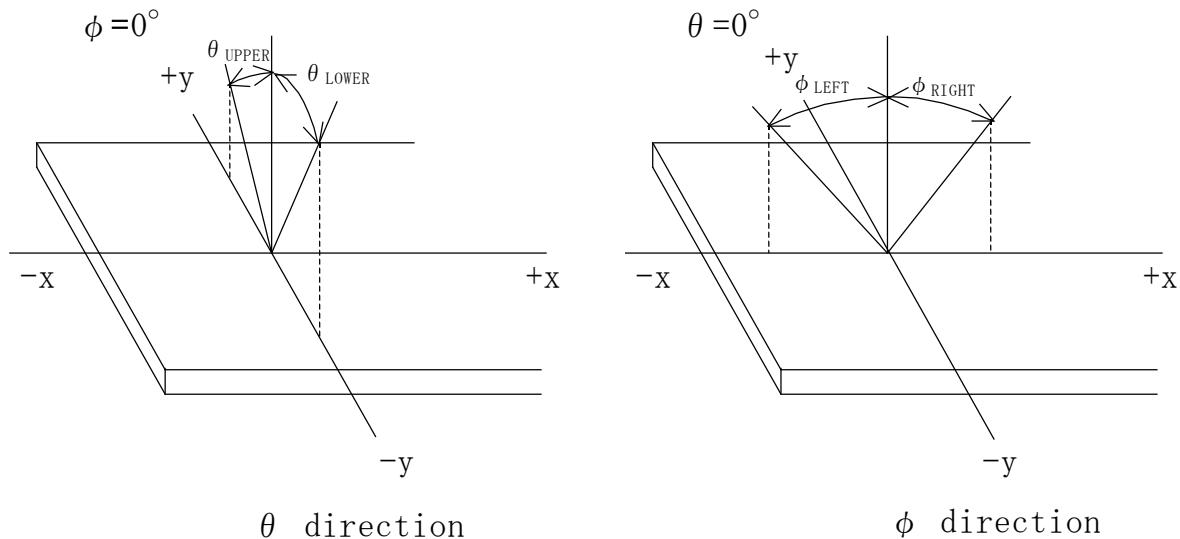

6-4. Brightness measuring points

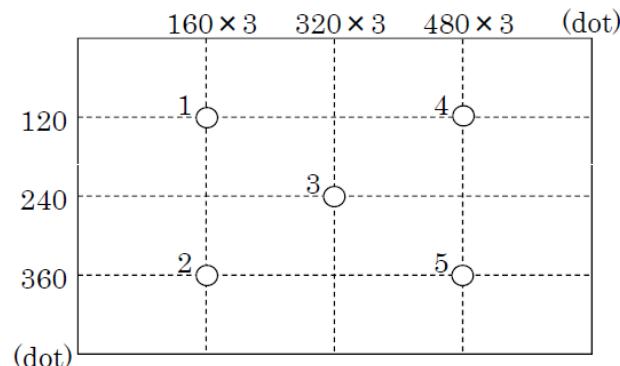

- 1) Rating is defined as the white brightness at center of display screen(3).
- 2) 5 minutes after LED is turned on. (Ambient Temp.=25°C)

Spec No.	Part No.	Page
TQ3C-8EAF0-E1YAG67-00	TCG104VGLCCANN-AN41	8

7. Interface signals

7-1. Interface signals

No.	Symbol	Description	Note
1	V _{DD}	+3.3V power supply	
2	V _{DD}	+3.3V power supply	
3	GND	GND	
4	GND	GND	
5	RxIN0-	LVDS receiver signal CH0(-)	LVDS
6	RxIN0+	LVDS receiver signal CH0(+)	LVDS
7	GND	GND	
8	RxIN1-	LVDS receiver signal CH1(-)	LVDS
9	RxIN1+	LVDS receiver signal CH1(+)	LVDS
10	GND	GND	
11	RxIN2-	LVDS receiver signal CH2(-)	LVDS
12	RxIN2+	LVDS receiver signal CH2(+)	LVDS
13	GND	GND	
14	CK IN1-	LVDS receiver signal CK(-)	LVDS
15	CK IN1+	LVDS receiver signal CK(+)	LVDS
16	GND	GND	
17	RxIN3-	LVDS receiver signal CH3(-)	LVDS
18	RxIN3+	LVDS receiver signal CH3(+)	LVDS
19	NC	No Connect	1)
20	SC	Scan direction control(GND: Normal、 High: Reverse)	2)

LCD connector : FI-SE20P-HFE (JAE)

1) Pin 19 is not connected to the internal display circuits. A connection on this pin will not impact the module operation in any way.

2)



SC = L



SC = H

7-2. LED

No.	Symbol	Description	Note
1	V _{IN}	+24V power supply	
2	V _{IN}	+24V power supply	
3	BLBRT	PWM signal(Brightness adjustment)	
4	BLEN	ON/OFF terminal voltage	
5	GND	GND	
6	GND	GND	
7	GND	GND	
8	GND	GND	
9	V _{IN}	+24V power supply	
10	V _{IN}	+24V power supply	

LCD connector : FI-S10P-HFE (JAE)


8. Input timing characteristics

8-1. Timing Characteristics


Item		Symbol	Min.	Typ.	Max.	Unit	Note
Clock (CK)	Frequency	1/Tc	22.66	25.2	27.69	MHz	
Enable signal (DE)	Horizontal Period	Th	750	800	850	Tc	
			27.1	31.7	-	μ s	1)
	Horizontal display period	Thd	640			Tc	
	Vertical Period	Tv	490	525	590	Th	
	Vertical display period	Tvd	480			Th	
Refresh rate		fv	50	60	70	Hz	2)

- 1) If the display is used under the condition which is out of specifications such as higher clock frequency than specified value, there is a possibility phenomenon such as display error including white display, malfunction and no image may occur.
Please use the display under the conditions written in the specification.
- 2) Please set a clock frequency, a vertical dormant period, and the horizontal dormant period so that the Horizontal Period should not reach less than Min. value.
- 3) If the refresh rate reach less than Min. value, the deterioration of the display quality, flicker etc., may occur.($fv=1/Tv$)

Vertical Timing Diagram

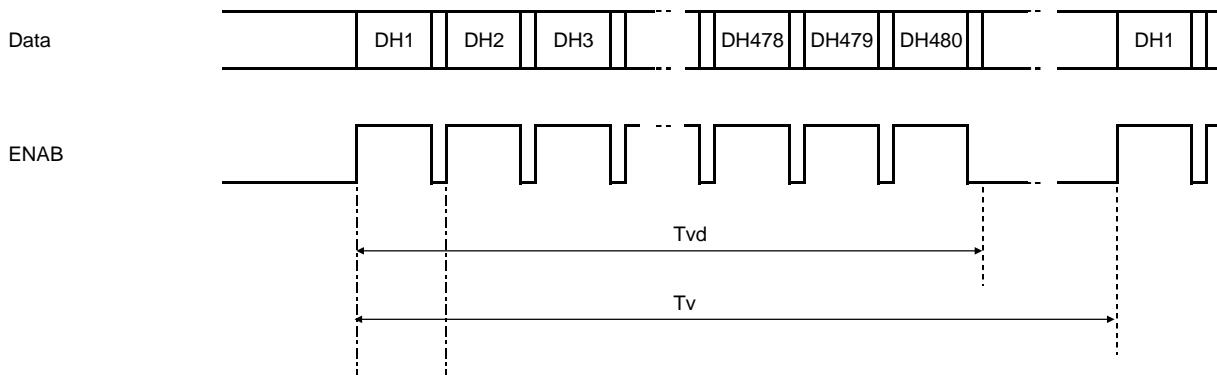


Horizontal Timing Diagram

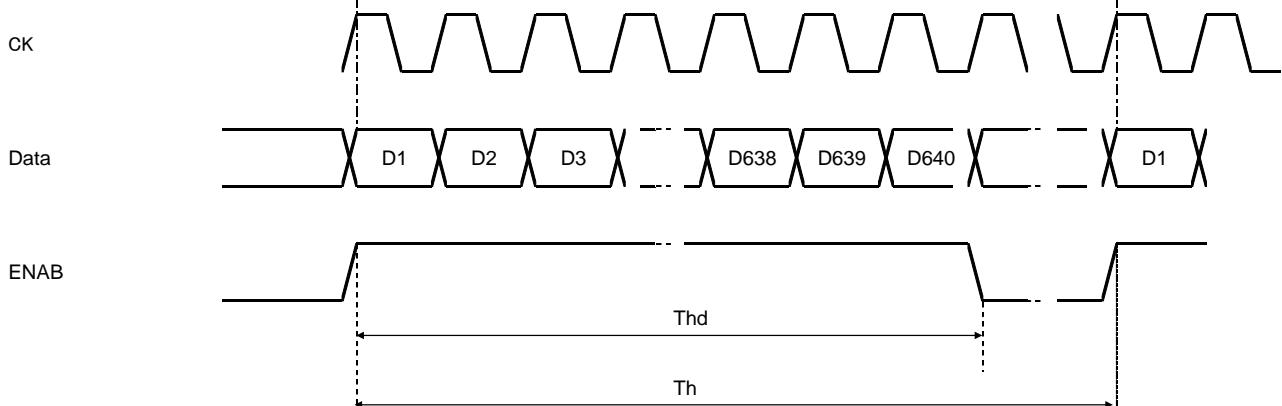


Spec No. TQ3C-8EAF0-E1YAG67-00	Part No. TCG104VGLCCANN-AN41	Page 10
-----------------------------------	---------------------------------	------------

8-2. Data

8-2-1.8bit Input

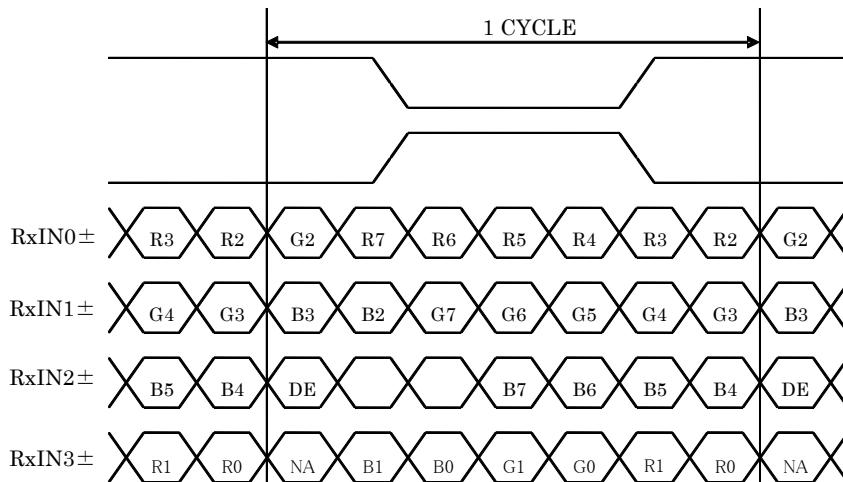


8-2-2.6bit Input

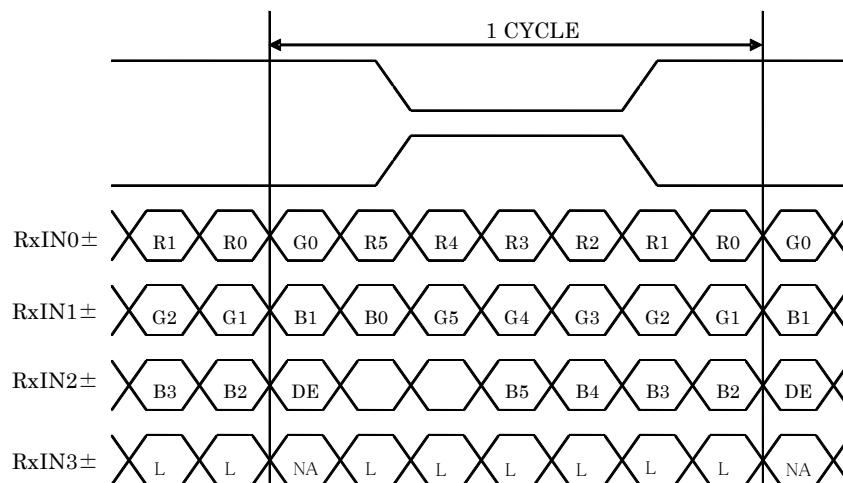

Spec No. TQ3C-8EAF0-E1YAG67-00	Part No. TCG104VGLCCANN-AN41	Page 11
-----------------------------------	---------------------------------	------------

8-3. Input Data Signals and Display position on the screen

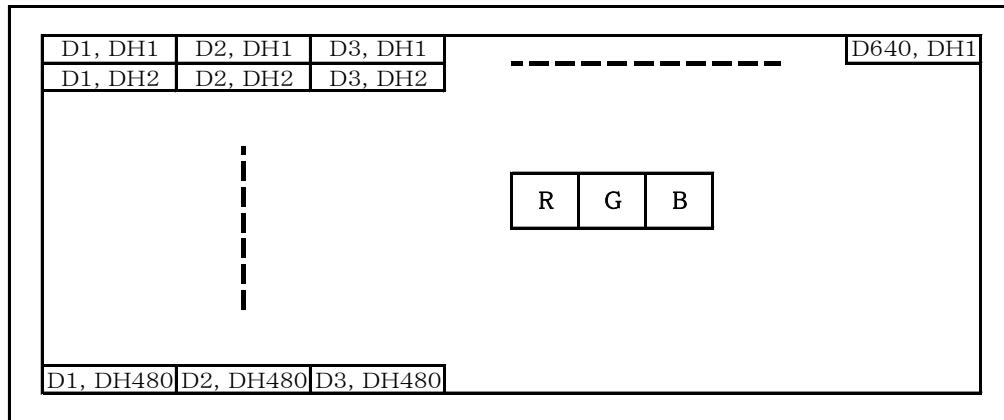

9. Lot number identification

The lot number shall be indicated on the back of the backlight case of each LCD.

TCG104VGLCCANN-AN41 - □□ - □□ - □ MADE IN □□□□□
 ↓ ↓ ↓ ↓
 1 2 3 4 5

No1. - No5. above indicate
 1. Year code
 2. Month code
 3. Date
 4. Version Number
 5. Country of origin (Japan or China)

Year	2017	2018	2019	2020	2021	2022
Code	7	8	9	0	1	2

Month	Jan.	Feb.	Mar.	Apr.	May	Jun.
Code	1	2	3	4	5	6

Month	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Code	7	8	9	X	Y	Z

Spec No.	Part No.	Page
TQ3C-8EAF0-E1YAG67-00	TCG104VGLCCANN-AN41	12

10. Warranty

10-1. Incoming inspection

Please inspect the LCD within one month after your receipt.

10-2. Production warranty

Kyocera warrants its LCD's for a period of 12 months from the ship date. Kyocera shall, by mutual agreement, replace or re-work defective LCD's that are shown to be Kyocera's responsibility.

Spec No.	Part No.	Page
TQ3C-8EAF0-E1YAG67-00	TCG104VGLCCANN-AN41	13

11. Precautions for use

11-1. Installation of the LCD

- 1) A transparent protection plate shall be added to protect the LCD and its polarizer.
- 2) The LCD shall be installed so that there is no pressure on the LSI chips.
- 3) The LCD shall be installed flat, without twisting or bending.
- 4) A transparent protection sheet is attached to the polarizer. Please remove the protection film slowly before use, paying attention to static electricity.

11-2. Static electricity

- 1) Since CMOS ICs are mounted directly onto the LCD glass, protection from static electricity is required.
- 2) Workers should use body grounding. Operator should wear ground straps.

11-3. LCD operation

- 1) The LCD shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.
- 2) Please select the best display pattern based on your evaluation because flicker, lines or nonuniformity or unevenness can be visible depending on display patterns.

11-4. Storage

- 1) The LCD shall be stored within the temperature and humidity limits specified.
Store in a dark area, and protect the LCD from direct sunlight or fluorescent light.
- 2) Always store the LCD so that it is free from external pressure onto it.

11-5. Usage

- 1) DO NOT store in a high humidity environment for extended periods. Polarizer degradation bubbles, and/or peeling off of the polarizer may result.
- 2) The front polarizer is easily scratched or damaged. Prevent touching it with any hard material, and from being pushed or rubbed.
- 3) The LCD screen may be cleaned by wiping the screen surface with a soft cloth or cotton pad using a little Ethanol.
- 4) Water may cause damage or discoloration of the polarizer. Clean condensation or moisture from any source immediately.
- 5) Always keep the LCD free from condensation during testing. Condensation may permanently spot or stain the polarizer.
- 6) Do not disassemble LCD because it will result in damage.
- 7) This Kyocera LCD has been specifically designed for use in general electronic devices, but not for use in a special environment such as usage in an active gas. Hence, when the LCD is supposed to be used in a special environment, evaluate the LCD thoroughly beforehand and do not expose the LCD to chemicals such as an active gas.
- 8) Please do not use solid-base image pattern for long hours because a temporary afterimage may appear. We recommend using screen saver etc. in cases where a solid-base image pattern must be used.
- 9) Liquid crystal may leak when the LCD is broken. Be careful not to let the fluid go into your eyes and mouth. In the case the fluid touches your body; rinse it off right away with water and soap.



Spec No. TQ3C-8EAF0-E1YAG67-00	Part No. TCG104VGLCCANN-AN41	Page 14
-----------------------------------	---------------------------------	------------

12. Reliability test data

Test item	Test condition	Test time	Judgement	
High temp. atmosphere	80°C	240h	Display function : No defect	Display quality : No defect
			Current consumption : No defect	
Low temp. atmosphere	-30°C	240h	Display function : No defect	Display quality : No defect
			Current consumption : No defect	
High temp. humidity atmosphere	40°C 90% RH	240h	Display function : No defect	Display quality : No defect
			Current consumption : No defect	
Temp. cycle	-30°C 0.5h R.T. 0.5h 80°C 0.5h	10cycles	Display function : No defect	Display quality : No defect
			Current consumption : No defect	
High temp. operation	80°C	500h	Display function : No defect	Display quality : No defect
			Current consumption : No defect	

- 1) Each test item uses a test LCD only once. The tested LCD is not used in any other tests.
- 2) The LCD is tested in circumstances in which there is no condensation.
- 3) The reliability test is not an out-going inspection.
- 4) The result of the reliability test is for your reference purpose only.
The reliability test is conducted only to examine the LCD's capability.

A horizontal scale bar with markings from 1 to 12. Below it is a rectangular box containing four small black L-shaped corner brackets.

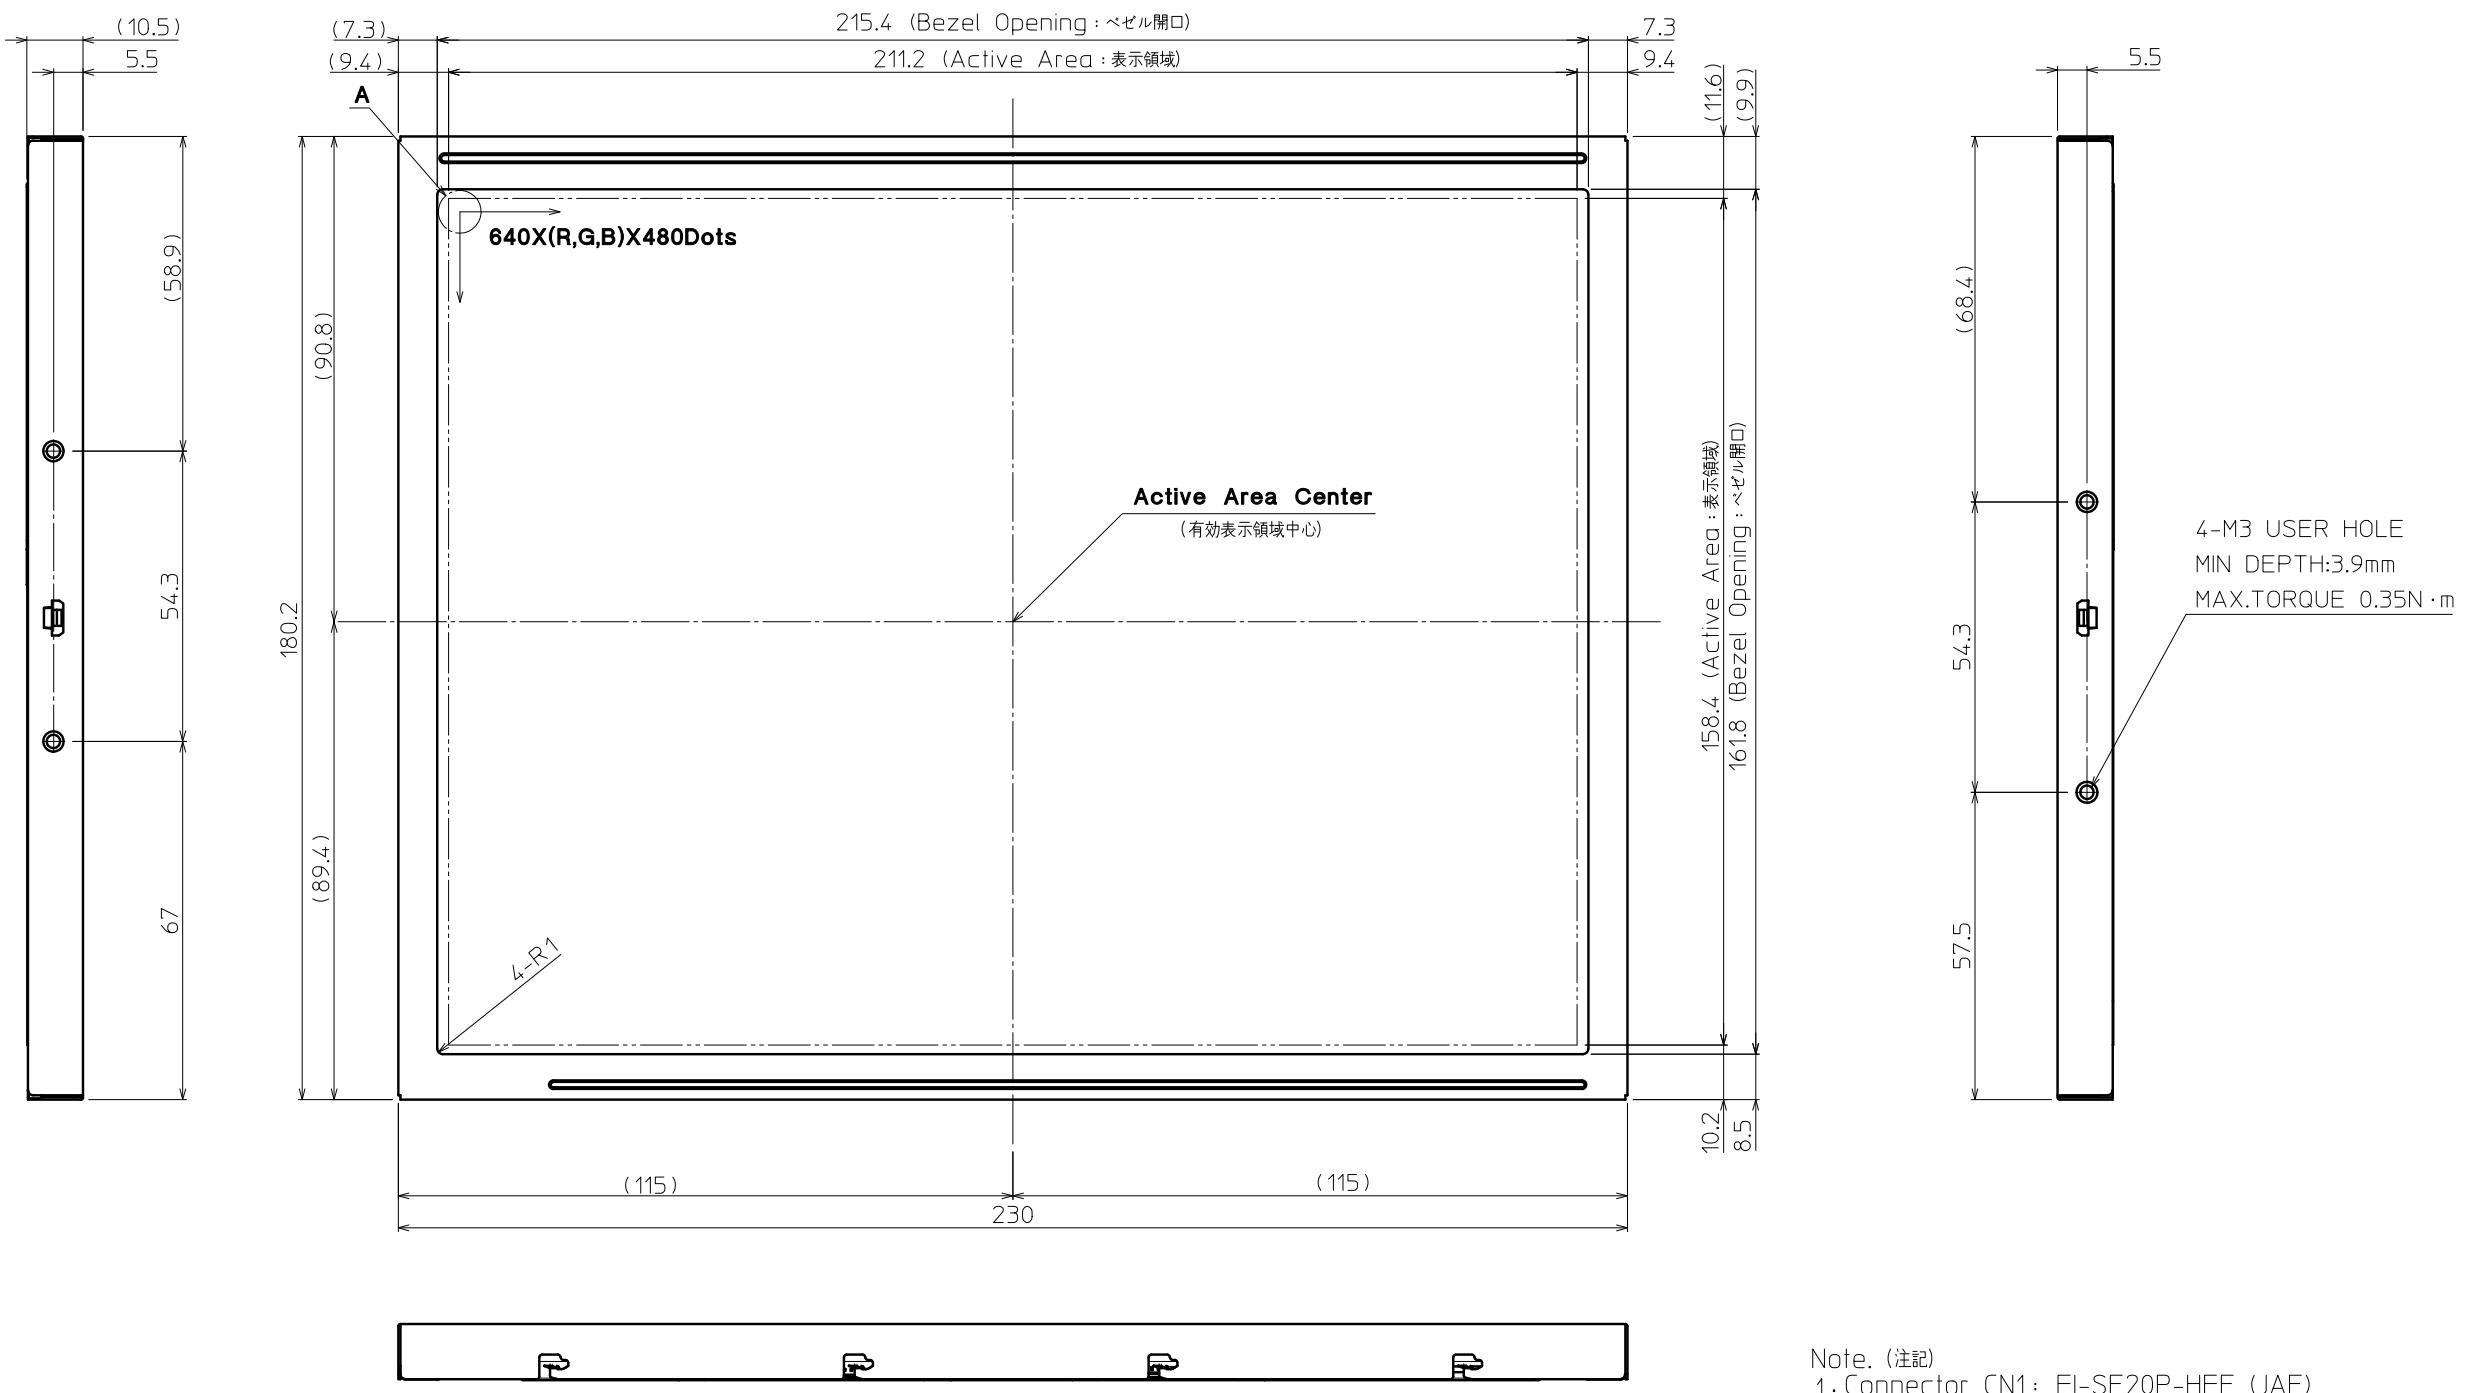


DETAIL A (Dot Size)

(NTS)

- Note. (注記)

 1. Connector CN1: FI-SE20P-HFE (JAE)
(コネクター) CN2: FI-S10P-HFE (JAE)
 2. Matching Connector CN1:FI-S20S,FI-SE20ME,FI-SE20MRE
(適合コネクター) CN2:FI-S10S
 3. The Information of LCD is displayed starting at the upper left hand corner, moving right then down to the lower right hand corner.
(LCDにおいて、画像データの表示は左上コーナーから始まり、右へ進み下へ送られ右下コーナーへ向かう。)
 4. Tolerance without indication: ± 0.5
(指示無き公差)
 5. Max screw length : 3.9max
(ネジ首下長さ)
 6. Max screw torque : 0.35N·m
(締め付けトルク)

Material 材質	Treatment 處理	Approved '15.02.26	Checked	Checked '15.02.26	Drawn	Scale 1:1(NTS)	Title	TCG104VGLACANN	G03A	KYOCERA	Year-Month-Day '15.02.25	Size 2
Quantity 製作數	Description; 備 考	RoHS 13232-06448-2	加藤	蔭山	倉元		Outline Dimensions		Drawing No. 121A8084900		1 / 2	

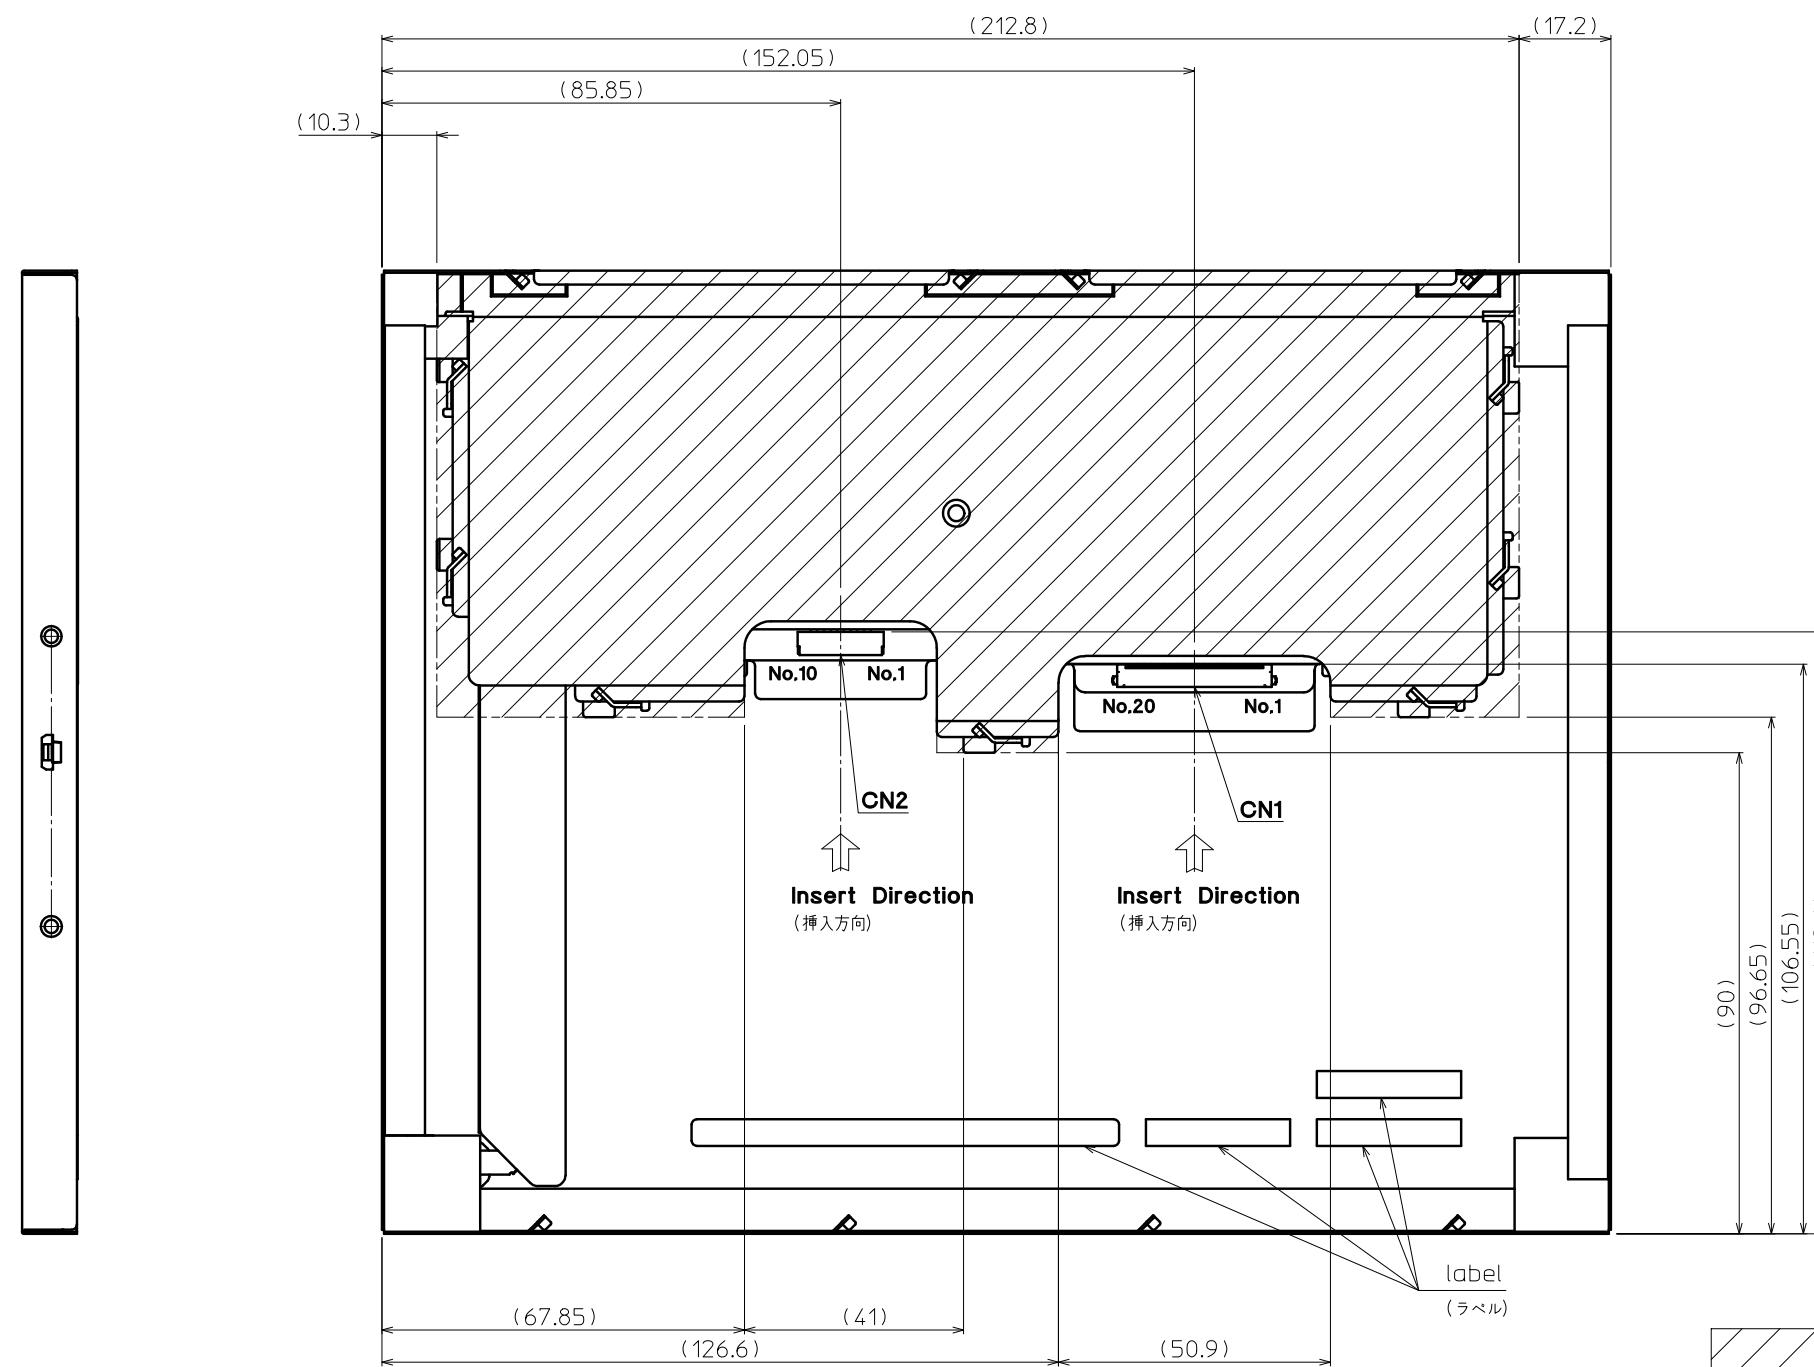

Spec No.	TQ3C-8EAF0-E2YAG67-00
Date	January 22, 2018

KYOCERA INSPECTION STANDARD

TYPE : TCG104VGLCCANN-AN41

KYOCERA DISPLAY CORPORATION

Original Issue Date	Designed by : Engineering dept.			Confirmed by : QA dept.	
	Prepared	Checked	Approved	Checked	Approved
January 22, 2018	S. Mori	K. Edo	<u>Y. Matsumoto</u>	H. Sumi	R. Sugano

Spec No.	Part No.	Page
TQ3C-8EAF0-E2YAG67-00	TCG104VGLCCANN-AN41	-





Revision record

Date	Designed by : Engineering dept.			Confirmed by : QA dept.	
	Prepared	Checked	Approved	Checked	Approved
Rev.No.	Date	Page	Descriptions		

Spec No. TQ3C-8EAF0-E2YAG67-00	Part No. TCG104VGLCCANN-AN41	Page 1
-----------------------------------	---------------------------------	-----------

Visuals specification

1) Note

Note											
General	<p>1. Customer identified anomalies not defined within this inspection standard shall be reviewed by Kyocera, and an additional standard shall be determined by mutual consent.</p> <p>2. This inspection standard about the image quality shall be applied to any defect within the active area and shall not be applicable to outside of the area.</p> <p>3. Inspection conditions</p> <table style="margin-left: 20px;"> <tr><td>Luminance</td><td>: 500 Lux min.</td></tr> <tr><td>Inspection distance</td><td>: 300 mm.</td></tr> <tr><td>Temperature</td><td>: 25 ± 5°C</td></tr> <tr><td>Direction</td><td>: Directly above</td></tr> </table>			Luminance	: 500 Lux min.	Inspection distance	: 300 mm.	Temperature	: 25 ± 5°C	Direction	: Directly above
Luminance	: 500 Lux min.										
Inspection distance	: 300 mm.										
Temperature	: 25 ± 5°C										
Direction	: Directly above										
Definition of inspection item	Dot defect	Bright dot defect	<p>The dot is constantly “on” when power applied to the LCD, even when all “Black” data sent to the screen.</p> <p>Inspection tool: 5% Transparency neutral density filter.</p> <p>Count dot: If the dot is visible through the filter.</p> <p>Don’t count dot: If the dot is not visible through the filter.</p>  dot defect								
	Black dot defect		<p>The dot is constantly “off” when power applied to the LCD, even when all “White” data sent to the screen.</p>								
	Adjacent dot		<p>Adjacent dot defect is defined as two or more bright dot defects or black dot defects.</p>  dot defect								
External inspection	Bubble, Scratch, Foreign particle (Polarizer, Cell, Backlight)		<p>Visible operating (all pixels “Black” or “White”) and non operating.</p>								
	Appearance inspection		<p>Does not satisfy the value at the spec.</p>								
Definition of size	<p>Definition of circle size</p>  $d = (a + b)/2$		<p>Definition of linear size</p> 								

Spec No. TQ3C-8EAF0-E2YAG67-00	Part No. TCG104VGLCCANN-AN41	Page 2
-----------------------------------	---------------------------------	-----------

2) Standard

Classification		Inspection item	Judgement standard	
Defect (in LCD glass)	Dot defect	Bright dot defect	Acceptable number : 4	Bright dot spacing : 5 mm or more
		Black dot defect	Acceptable number : 5	Black dot spacing : 5 mm or more
		2 dot join	Acceptable number : 2	Bright dot defect
		Black dot defect	Acceptable number : 3	
		3 or more dots join	Acceptable number : 0	
		Total dot defects	Acceptable number : 5 Max	
External inspection (Defect on Polarizer or between Polarizer and LCD glass)	Others	White dot, Dark dot (Circle)	Size (mm)	Acceptable number
			$d \leq 0.2$	(Neglected)
			$0.2 < d \leq 0.4$	5
			$0.4 < d \leq 0.5$	3
			$0.5 < d$	0
	Polarizer (Scratch)	Polarizer (Scratch)	Width (mm)	Length (mm)
			$W \leq 0.1$	—
			$0.1 < W \leq 0.3$	$L \leq 5.0$
			$5.0 < L$	0
			$0.3 < W$	—
	Polarizer (Bubble)	Polarizer (Bubble)	Size (mm)	Acceptable number
			$d \leq 0.2$	(Neglected)
			$0.2 < d \leq 0.3$	5
			$0.3 < d \leq 0.5$	3
			$0.5 < d$	0
	Foreign particle (Circular shape)	Foreign particle (Circular shape)	Size (mm)	Acceptable number
			$d \leq 0.2$	(Neglected)
			$0.2 < d \leq 0.4$	5
			$0.4 < d \leq 0.5$	3
			$0.5 < d$	0
	Foreign particle (Linear shape) Scratch	Foreign particle (Linear shape) Scratch	Width (mm)	Length (mm)
			$W \leq 0.03$	—
			$0.03 < W \leq 0.1$	$L \leq 2.0$
			$2.0 < L \leq 4.0$	3
			$4.0 < L$	0
	Color variation (Mura)	Color variation (Mura)	$0.1 < W$	—
				(According to circular shape)
		Not to be significantly visible. Consultation shall be held as necessary.		

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894450-0
E-Mail: info@fortecag.de
Internet: www.fortecag.de

Fortec Group Members

Austria



Distec GmbH Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@distec.de
Internet: www.distec.de

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

Osprey House, 1 Osprey Court
Hichingbrooke Business Park
Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apollodisplays.com
Internet: www.apollodisplays.com