


Datasheet

DMC

ATP/AST Series

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

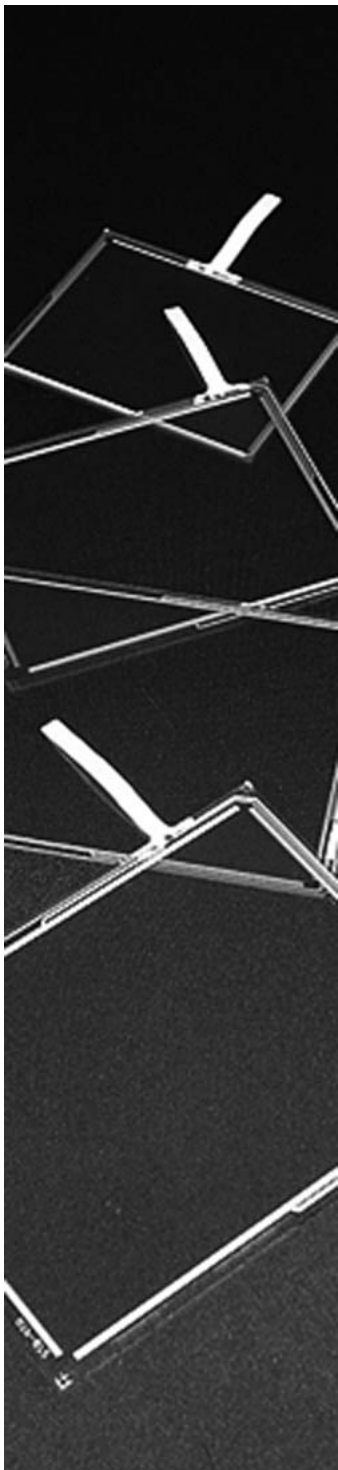

DMC Co., Ltd.

**Analog Resistive Touchscreen
ATP/AST Series Product Specifications**

Table of Contents

1. Product Specifications 3

 1-1. Product Applicable 3

 1-2. Structure 3

 1-3. Environmental Specifications 3

 1-4. Mechanical Characteristics 3

 1-5. Electrical Characteristics 3

 1-6. Appearance 4

2. Testing Regulation 5

 2-1. Testing Regulation 5

 2-2. Environmental Specifications 5

 2-3. Mechanical Characteristics 5

 2-4. Electrical Characteristics 6

 2-5. Appearance 6

3. Reliability Condition 7

 3-1. Temperature Condition 7

4. Recommended Connector 7

 4-1. Recommended Connector 7

5. Handling Notes 8

 5-1. Precautions 8

 5-2. Handling Notes 8

 5-3. Construction Notes 8

 5-4. Electrical & Software Notice 8

 5-5. Mounting Notes 9

6. Warranty 10

 6-1. Warranty Period 10

 6-2. Warranty Target 10

 6-3. Warranty Exceptions 10

 6-4. Tools 10

 6-5. Changes 10

7. Revision history 11

1. Product Specifications

1-1. Product Applicable

§ This specification is applied to the analog resistive touchscreen: ATP/AST Series.

1-2. Structure

§ Dimensions, structure, and shape are referred on the drawing attached.

1-3. Environmental Specifications

| Specification | Value |
|--------------------------------------|---|
| Operating Temperature | -20°C to 70°C (no condensation) |
| Operating Humidity | -20°C to 60°C Less than 90%RH (no condensation) Exceeding 60°C 133.8g/m ³ (no condensation) |
| Storage Temperature | -40°C to 80°C (no condensation) |
| Storage Humidity | -40°C to 60°C Less than 95%RH (no condensation) Exceeding 60°C 142.9g/m ³ (no condensation) |
| Chemical Resistance (top surface) | Toluene, Trichloroethylene, Athetone, Alcohol, Gasoline, Machine Oil, Ammonia, Glass Cleaner, Mayonnaise, Ketchup, Wine, Salad Oil, Vinegar, Lipstick, etc. |

1-4. Mechanical Characteristics

| Specification | Value |
|---------------------|---|
| Activation Force | 0.05N to 0.8N |
| Operating Life | Input (finger) 10,000,000 hits |
| | Character Input (pen) 100,000 characters |
| Light Transmittance | Over 80% (typical value at full wavelength) |
| Surface Hardness | Over 2H (by JIS pencil hardness) |

1-5. Electrical Characteristics

| Specification | Value |
|-----------------------|---|
| Maximum Voltage | DC6V |
| Maximum Current | Top Electrode 100mA |
| | Bottom Electrode 100mA |
| | Between the Top and Bottom 0.5mA |
| Linearity | Under ±2% (Under ±1% (typical value)) |
| Terminal Resistance | Top Electrode Less than 1kΩ |
| | Bottom Electrode Less than 1kΩ |
| Insulation Resistance | Neighboring Terminals Over 20MΩ at 25V |
| | Active Area Electrodes Over 20MΩ at 25V |
| Chattering | Less than 10msec at ON/OFF. |

1-6. Appearance

§ Scratch, dust (W = width, L = length, D = average diameter = (longest + shortest) /2)

| Item | Width (mm) | Length (mm) | Acceptable Numbers | Total |
|---|-----------------------|-------------|----------------------------|--------------------|
| Linear(Scratch/Dust) Over 0.1mm in diameter refer to the Circular. | $0.1 \geq W > 0.05$ | $4 \geq L$ | 1pcs in $\phi 30\text{mm}$ | Within 5pcs /panel |
| | $0.05 \geq W > 0.03$ | $10 \geq L$ | 2pcs in $\phi 20\text{mm}$ | |
| | $0.03 \geq W$ | $20 \geq L$ | Acceptable | |
| Circular (Scratch/Dust) | $0.4 \geq D > 0.3$ *1 | | 1pcs in viewing area *1 | |
| | $0.3 \geq D > 0.2$ | | 2pcs in $\phi 30\text{mm}$ | |
| | $0.2 \geq D$ | | Acceptable | |




Applied only in the Active Area. Scratches or dusts in the outside of the Active Area are acceptable unless the electrical characteristics are affected.

*1 Applied to the size of 14 inches or more.

§ Dirt

Acceptable if not noticeable on a black mat.

§ Tip, crack (t = glass thickness) (applicable only for the glass)

| Item | Size (mm) | Acceptable Numbers | |
|---|-----------|--------------------|-------------|
| Corner  | X | ≤ 3 | 2pcs /panel |
| | Y | ≤ 3 | |
| | Z | $\leq t$ | |
| Side  | X | ≤ 5 | 2pcs /side |
| | Y | ≤ 3 | |
| | Z | $\leq t$ | |
| Crack  | | Not acceptable | |

2. Testing Regulation

2-1. Testing Regulation

§ If the regulation is not specified, the test is performed under the supplier's regulation.

§ Tests are performed under the room temperature unless specified. The room temperature is referred as follows:

Temperature: 20°C±5°C
 Humidity: 65%±10%RH

2-2. Environmental Specifications

§ Chemical Resistance Test

Condition: Tested after leaving the chemical on the surface for 12 hours being wiped off by cloth.

Judgement: Must be no effect in appearance.

2-3. Mechanical Characteristics

§ Activation Force Test

Condition: Measured by depressing the point between the dots to the conduction by the testing rod (Figure 1).

Judgement: Must satisfy the specification.




Figure 1. Testing rod 1

§ Operating Life Test (Finger)

Condition: Testing rod: Refer to Figure 1
 Voltage: DC5V
 Load: 3N
 Cycle: 2 hits/sec

Judgement: Must satisfy the following:

Activation Force: Must satisfy the specification.
 Linearity: Must satisfy the specification.
 Terminal Resistance: Must satisfy the specification.
 Insulation Resistance: Must satisfy the specification.

§ Operating Life Test (Pen)

Condition: Testing rod: Refer to Figure 2
 Voltage: DC5V
 Load: 2.5N
 Input size: 10 x 10 mm
 Input character: A to Z/minute




Figure 2. Testing rod 2

Judgement: Must satisfy the following:

Activation Force: Must satisfy the specification.
 Linearity: Must satisfy the specification.
 Terminal Resistance: Must satisfy the specification.
 Insulation Resistance: Must satisfy the specification.

2-4. Electrical Characteristics

§ Terminal Resistance Test

Condition: Top and bottom electrodes are measured at the terminal.

Judgement: Must satisfy the specification.

§ Insulation Resistance Test

Neighboring Terminals: Measured by applying the reference voltage to the terminals

Active Area Electrodes: Measured by applying the reference voltage to the top and bottom electrodes.

Judgement: Must satisfy the specification.

2-5. Appearance

§ Appearance Test

Condition: Tested by an examiner with over 1.0 eyesight at 30cm away from the product under the transmittable light at over 60° the surface of the product.

Judgement: Must satisfy the specification.

3. Reliability Condition

3-1. Temperature Condition

§ Temperature Condition Test

Following test are performed in the condition with no dew condensation:

Cold Test: Tested after leaving the parts in $-40^{\circ}\text{C}\pm 3^{\circ}\text{C}$ for 240 hours and in the room temperature for 2 hours.

Heat Test: Tested after leaving the parts in $80^{\circ}\text{C}\pm 3^{\circ}\text{C}$ for 240 hours and in the room temperature for 2 hours.

Humidity Test: Tested after leaving the parts in the temperature $60^{\circ}\text{C}\pm 3^{\circ}\text{C}$, humidity 90 to 95% for 240 hours and in the room temperature for 2 hours.

Cycle Test: Tested after 5 cycles of leaving the parts in the temperature $-30^{\circ}\text{C}\pm 3^{\circ}\text{C}$ for 1 hour and in the room temperature for 0.5 hours, then leaving the parts in the temperature $70^{\circ}\text{C}\pm 3^{\circ}\text{C}$ for 1 hour and in the room temperature for 0.5 hours.

Judgement: Must satisfy the following:

Activation Force: Must satisfy the specification.

Linearity: Must satisfy the specification.

Terminal Resistance: Must satisfy the specification.

Insulation Resistance: Must satisfy the specification.

Appearance: Must satisfy the specification.

4. Recommended Connector

4-1. Recommended Connector

| Part No. | Pins | Pitch |
|----------|--------------------|--------|
| KCA-K4R | 4 pin Double-sided | 1.25mm |

5. Handling Notes

5-1. Precautions

§ This product is intended for use in standard applications (computers, office automation, and other office equipment, industrial, communications, and measurement equipment, personal and household devices, etc.) Please avoid using this product for special applications where failure or abnormal operation may directly affect human lives, or cause physical injury or property damage, or where extremely high levels of reliability are required (such as aerospace systems, vehicle operating control, atomic energy controls, medical devices for life support, etc.).

5-2. Handling Notes

§ Do not depress or scratch the product with any object with a sharp edge or end.

§ Do not forcibly bend or fold the product.

§ When the product is stored, make sure it is packed in a packing box and stored in a storage temperature range, eliminating any outside load.

§ Do not use or store the product under a condition where the product will be exposed to water, organic solution or acid.

§ Do not use the product under the direct sunlight.

§ Do not disassemble the product.

§ When you handle the product, Hold the product by its body. Do not hold by the tail.

§ Clean the product with a soft cloth or a soft cloth with neutral detergent or alcohol. When contaminated by chemicals, wipe them off immediately with caution not to cause injury to human body.

§ The edge of the glass is not rounded and may cause injury.

5-3. Construction Notes

§ The environmental specifications, mechanical characteristics, and electrical characteristics are only applied to the Active Area.

§ Do not use the touchscreen when the condensation occurs. The condensation inside of the touchscreen is a natural phenomenon and should disappear after the touchscreen is warmed up.

5-4. Electrical & Software Notice

The best performance can be obtained when used with the original analog resistive touchscreen controller, "TSC-10" Series. If the touchscreen controller or controller software is to be developed by the customer, please note the following:

§ There is a contact resistance between the top and bottom electrodes and it changes by the pressure of a finger or a pen. The data must be read after the contact resistance becomes stabilized.

§ The terminal resistance of the analog resistive touchscreen varies by the individual, time, and environment. The controller software must have the calibration function to adjust the input position and the display position.


§ The analog resistive touchscreen outputs 2 point input as 1 point in between the 2 points. The controller software must not be designed to have the 2 point input function.

§ For drawing applications, the line may be intermittent when the pen comes on the dot spacers. A software compensation is needed.

5-5. Mounting Notes


§ Bezel Edge

Bezel edge must be positioned in the area between the Active Area and the Viewing Area. The bezel may press the touchscreen and cause input if the edge enters the Active Area.

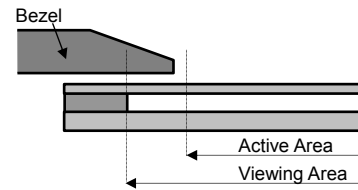

§ Gap between the Bezel and Touchscreen


A gap of approximately 0.5mm is needed between the bezel and the top electrode. It may cause unexpected input if the gap is too narrow.

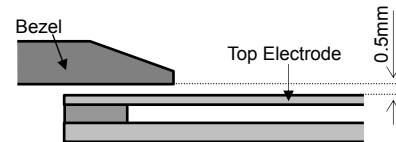

§ Cushion


If a cushion is used between the bezel and the top electrode, the cushion must be free enough to absorb the expansion and contraction difference between the bezel and the top electrode. If the cushion is squashed too hard, the expansion and the contraction difference may cause the distortion to the top electrode.

The cushion must be positioned more than 1mm outward from an inside of the insulation area. (Please refer to right figure)

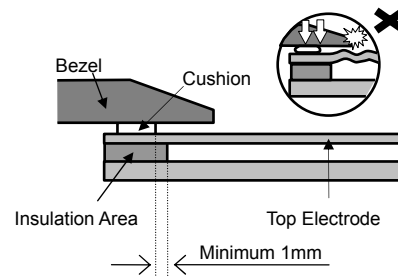


§ Tolerance

There is a tolerance of 0.2 to 0.3mm for the dimensions of the touchscreen and the tail. A gap must be made to absorb the tolerance in the case and the connector.

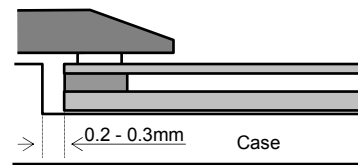

§ Tail

The tail must not be forcibly stressed or bent too hard to avoid the conduction in the insulated area and wire breaking.

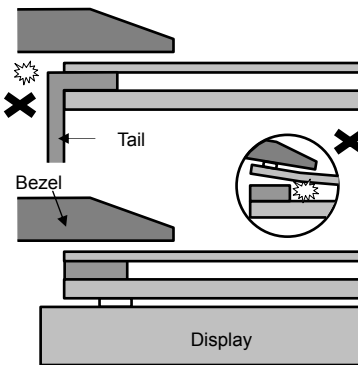


§ Mounting

Touchscreen must be held from the bottom such as the structure gluing the touchscreen onto the display. If the touchscreen is glued to the bezel, the adhesion between the top and bottom electrode is stressed and may come off.

§ Forbidden Area

The area within 2mm from the insulation area is structurally weak for the pressure, especially for pen use. The film may be forcibly bent and may cause deflection. This area must be protected by the bezel and input must be avoided.

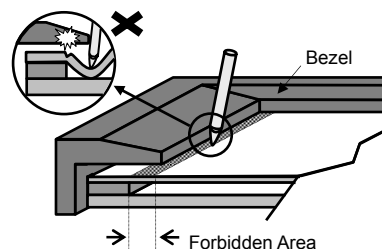

§ Air Vent

Most of the touchscreens have the air vent to equalize the inside air pressure to the outside one. The air vent must be open and liquid contact must be avoided as the liquid may be absorbed if the liquid is accumulated near the air vent. The top electrode must not be swelled by the air pressure from inside of the case.



6. Warranty

6-1. Warranty Period

- § The warranty period is limited to 1 year from the date of shipping. The warranty for the initial deflection such as appearance deflection is limited to 1 month.
- § Any defected parts under proper use will be examined by the supplier and replaced by the new parts if the deflection is considered to be caused by the supplier.
- § The replacement is subject to be included in the next lot.

6-2. Warranty Target

- § The warranty only covers the product itself and does not cover any damage to others caused by using this product. Onsite repair or replacement is not supported.
- § We will do our best for delivery problem and product deflections, but the warranty for the production line is not covered.
- § Resistive touchscreens are structurally not repairable. All deflections are subject to replacement.

6-3. Warranty Exceptions

Following conditions are not covered with the warranty and subject to charge.

- § Any malfunctions and damages during transportation and transfer by the user.
- § Any malfunctions and damages caused by a natural disaster or a fire.
- § Any malfunctions and damages caused by static electricity
- § Any malfunctions and damages caused by the failure of the associated equipment.
- § If the product is remodeled, disassembled or repaired by the user.
- § If the product is glued onto the equipment and uninstalled.
- § Any malfunctions and damages caused by an improper usage and handling against the specifications and notes.

6-4. Tools

- § To maintain the quality, the printing screens and the die-cut plates are generally limited to use up to 1 year. Reorders after 1 year from the initial order or from the last renewal are subject to the tooling charge for replacing the printing screens and the die-cut plates. Reorders for the discontinued standard parts are also subject to tooling charge.
- § All the tools, such as CAD data (except for the drawing for approval), block copies (films), printing screens, and die-cut plates are not to be provided for administrative purpose.

6-5. Changes

- § Because of the manufacturing process, changing the dimensions, circuit pattern, and the tail position requires replacing most of the tools and is subject to high tooling charge. Please be careful when ordering and approving the drawing.
- § Circuit pattern and the materials that does not affect the environmental, electrical, and mechanical characteristics such as film, glass, ink and glue are subject to change for the supplier's reason or for improvement within the specifications.
- § Standard products are subject to change for improvement without notice.

7. Revision history

Rev1 (April 15, 1998)

Initial release

Rev2 (June 1, 1999)

The overall revision by specification review.

Rev3 (April 1, 2002)

The address in the office was changed by the move.

Rev4 (August 16, 2002)

1-4.Activation Force is changed "50g± 30g" to "0.5N±0.3".

1-4.Light Transmission is changed 76% to 80%(TYP).

Rev5 (September 3, 2002)

1-3.Operating Temperature is changed "0°C to 60°C" to "-20°C to 70°C".

1-3.Storing Temperature is changed "-20°C to 70°C" to "-40°C to 80°C"

1-4.Operating Life is changed "1,000,000 hits" to "10,000,000 hits".

1-5.Linearity is changed "Under ±2%" to "Under ±1% (typical value)".

Rev6 (June 28, 2004)

1-3.Operating Humidity is changed "Less than 90%RH (no condensation)" to "-20°C to 60°C Less than 90%RH (no condensation) Exceeding 60°C 133.8g/m³ (no condensation)".

1-3.Storing Humidity is changed "Less than 95%RH (no condensation)" to "-40°C to 60°C Less than 95%RH (no condensation), Exceeding 60°C 142.9g/m³ (no condensation)".

1-5.Maximum Voltage is changed "DC5V" to "DC6V".

1-5.Linearity is changed "Under ±1% (typical value)" to "Under ±2% (Under ±1% (typical value))".

Rev7 (October 15, 2004)

4-4.Electrical & Software Notice: Changed "FIT-10 series" to "TSC-10 series".

Rev8 (April 7, 2005)

Added Item4 Recommended Connector.

Rev9 (September 6, 2005)

2-3.Mechanical Characteristics: Added Operating Life Test (Pen).

Rev10 (November 10, 2006)

The specification item name was changed.

- 1-3."Storing Temperature" to "Storage Temperature"
- 1-3."Storing Humidity" to "Storage Humidity"
- 1-4."Operating Load" to "Activation Force"
- 1-4."Light Transmissivity" to "Light Transmittance"
- 1-4."Top Surface Hardness" to "Surface Hardness"
- 2-3."Operating Load Test" to "Activation Force Test"
- 2-3."Operating Load" to "Activation Force"
- 3-1."Operating Load" to "Activation Force"
- 1-4. Operating Force is changed "0.5N±0.3N" to "0.05N to 0.8N".
- 1-5. Insulation Resistance is changed "Over 100MΩ at 25V" to "Over 20MΩ at 25V".
- 1-6. Tip, crack: Deleted "Applied only in the Active Area. Scratches or dusts in the outside of the Active Area are acceptable unless the electrical characteristics are affected."
- 2-3. § Operating Life Test (Pen) Load: 300g to 250g
- 5-5. § Cushion: Added an installation position of a cushion.
- 7. Added Revision History.

Rev11 (March 23, 2010)

- 1-6. Appearance specification was revised. Characters of scratch/dust were classified into Circular and Linear. The total acceptable number of scratch/dust was added.
- 2-3. Unit of Load (g) changed to (N) to unify the unit
- 2-3. Operating Life Test (Finger) Activation Force, Within ±50% of the specification → Must satisfy the specification. (Clerical error was corrected)
- 2-3. Operating Life Test (Pen) Activation Force, Within ±50% of the specification → Must satisfy the specification. (Clerical error was corrected)
- 3-1. Temperature Condition Cold Test -30℃→ -40℃ (Clerical error was corrected)
- 3-1. Activation Force, Within ±50% of the specification. → Must satisfy the specification (Clerical error was corrected)

ATP/AST Series Product Specifications
Rev. 11, March 23, 2010
©1999 - 2010 DMC Co., Ltd.

This document can be freely distributed, but any alternation to this document is prohibited.

DMC Co., Ltd.

<http://www.dmccoltd.com/english/>

9th floor, Kanda Sento Building, 1-2-4 Yushima, Bunkyo-Ku, Tokyo 113-0034, Japan

Phone: +81-3-5209-7131 (Japanese), 7135 (English) Fax: +81-3-5209-7130

Our company network supports you worldwide with offices in Germany, Great Britain, Turkey and the USA.
For more information please contact:



DATA DISPLAY GROUP

A **FORTEC** GROUP MEMBER

Distec GmbH

Augsburger Str. 2b
82110 Germering
Germany

Phone: +49 (0)89 / 89 43 63-0
Fax: +49 (0)89 / 89 43 63-131
E-Mail: info@datadisplay-group.de
Internet: www.datadisplay-group.de

Display Technology Ltd.

5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF
United Kingdom
Phone: +44 (0)1634 / 67 27 55
Fax: +44 (0)1634 / 67 27 54
E-Mail: info@displaytechnology.co.uk
Internet: www.datadisplay-group.com

Sales Partner:

DATA DISPLAY BİLİŞİM TEKNOLOJİLERİ İÇ VE DIŞ TİCARET LİMİTED ŞİRKETİ

Barbaros Mh. Ak Zambak Sk. A Blok D:143
34376 Ataşehir / Istanbul
Turkey
Phone: +90 (0)216 / 688 04 68
Fax: +90 (0)216 / 688 04 69
E-Mail: info@data-display.com.tr
Internet: www.data-display.com.tr

FORTEC Elektronik AG

Lechwiesenstr. 9
86899 Landsberg am Lech
Germany

Phone: +49 (0)8191 / 911 72-0
Fax: +49 (0)8191 / 217 70
E-Mail: sales@fortecag.de
Internet: www.fortecag.de

Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779
United States of America
Phone: +1 631 / 580-43 60
Fax: +1 631 / 580-43 70
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com