



DLF1505-I / DLH1505-I V1
15" TFT LCD, LED Backlight 1000nits, XGA(1024x768)

The DLF/DLH1505-I is a 15 inch industrial grade sunlight readable LCD, with high brightness 1000 nits and high color saturation, it produce sharp images, crisp text and lifelike colors. The Durapixel LED backlight technology ensures high reliability and low power consumption, suitable for outdoor application, kiosk, factory automation, military, transportation and gaming application.

Key Features

- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Low Power Consumption
- Wide Operation Temperature
- BL MTBF: 100,000 hours



Specifications

Model Name	DLF1505-I / DLH1505-I V1
Description	15" TFT LCD, LED Backlight 1000 nits, XGA (1024x768)
Screen Size	15"
Display Area (mm)	304.1(H) x 228.1(V)
Brightness	1000 cd/m ²
Resolution	1024x768
Aspect Ratio	4 : 3
Contrast Ratio	2000 : 1
Pixel Pitch (mm)	0.297(H) x 0.297(V)
Pixel Pre Inch (PPI)	85
Viewing Angle	176°(H),176°(V)
Color Saturation (NTSC)	81%
Display Colors	16.2M
Response Time (Typical)	23ms
Panel Interface	LVDS
AD Board Input Interface	VGA, DVI-D, HDMI
AD Board Input Power	DC12V
Power Consumption	12.6W (17.6W with AD Board)
OSD Key	4 Keys (Power Switch, Menu, +, -)
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Position...etc
Dimensions (mm)	326.5 x 253.5 x 9.1
Bezel Size(U/B/L/R)	11.1/11.1/9.55/9.55 mm
Weight (Net)	0.96kg
Operating Temperature	-20 °C ~ 70 °C
Storage Temperature	-30 °C ~ 70 °C

DLF= Panel + LED Driving Board

DLH= Panel + LED Driving Board + AD Control Board



Specifications are subject to change without notice.
 All brands or product names are trademarks or registered trademarks of their respective companies.



Mechanical Drawing

Outline Dimensions

Unit:mm

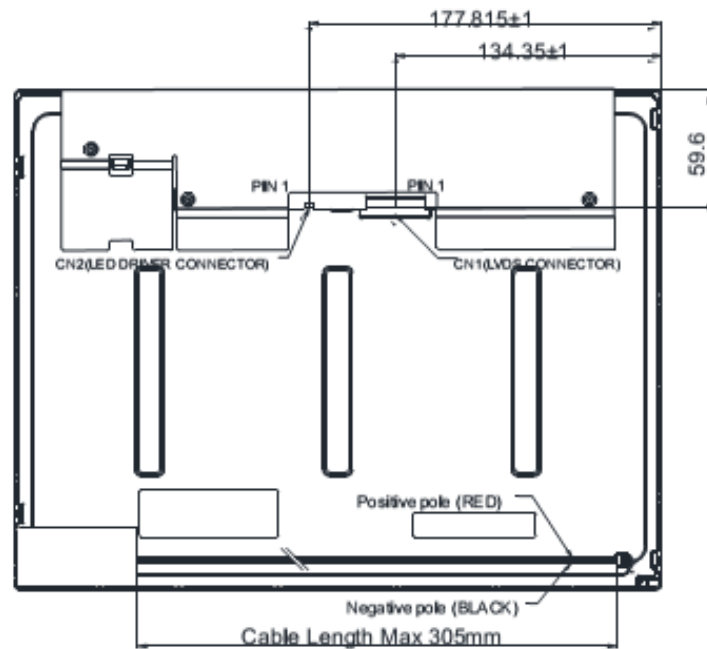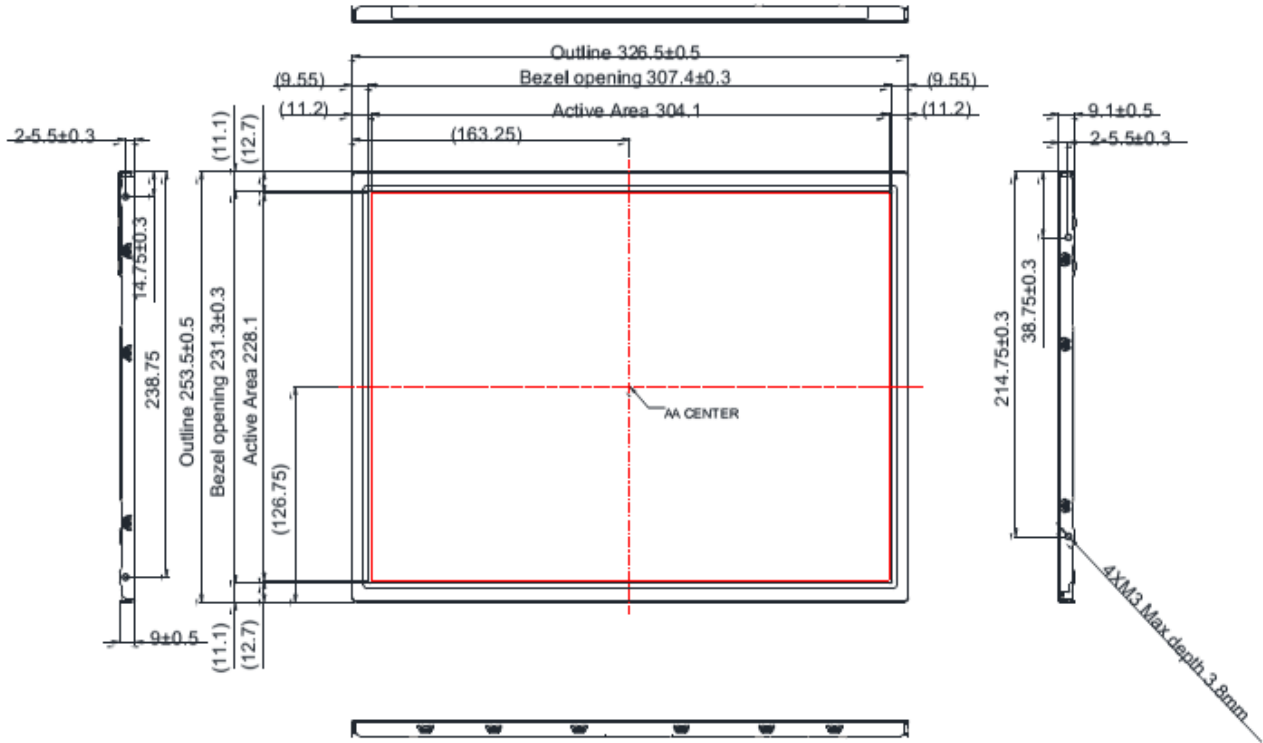

Note :

1. Tolerance is $\pm 0.5 \text{mm}$ unless noted.
2. "()" marks the reference dimension.



Ordering Information

Part Number	Description
DLF1505-INN-A01	15",1000nits,XGA,LID15C,5in1,V1
DLH1505-INN-G01	15",1000nits,XGA,LID15C,AD2662GDH,DC12V,5in1,V1

Optional Accessories

Part Number	Description
840612051212	ADAPTER,AC/DC,12V/5 A,60W.Power-Din-4P,CWT.G99-ABF060F-N022.Efficiency-level-6,R
810618301010	CABLE.POWER.AC.1830mm USA type
810618301090	CABLE,POWER,AC,1830mm Europe type
810618301050	CABLE.POWER.AC.1830mm UK type
810618301170	CABLE.POWER,AC,1830mm Australia type
810618301031	CABLE.POWER.AC.1830mm Japan type

Customer request

Touch	SCT (Single-Touch), PCT (Multi-Touch)
Glass	Tempered glass, AR coating.....