



SSF1515-E / SSH1515-E V2

15.9" Resizing LCD, 1000 nits LED backlight, 1280x512 ultra wide aspect ratio 16:6.4

The SSF/SSH1515-E V2 is a 15.9 inch color TFT-LCD display with special aspect ratio 16:6.4 and wide resolution 1280 x 512. It is Litemax's Spanpixel series product which designed for high brightness 1000 nits with power efficiency LED backlight. It provides LCD panel with specific aspect ratios and sunlight readable for digital signage, public transportation, exhibition hall, department store, and vending machine.

Key Features

- Resizing LCD
- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Slim Bezel
- BL MTBF: 70,000 hours



Specifications

Model Name	SSF1515-E / SSH1515-E V2
Description	15.9" Resizing LCD, 1000 nits LED backlight, 1280x512
Screen Size	15.9"
Display Area (mm)	376.3(H) x 150.5(V)
Brightness	1000 cd/m ²
Resolution	1280 x 512
Aspect Ratio	16 : 6.4
Contrast Ratio	1000 : 1
Pixel Pitch (mm)	0.294(H) x 0.294(V)
Pixel Per Inch (PPI)	86
Viewing Angle	170°(H), 160°(V)
Color Saturation (NTSC)	79%
Display Colors	16.7M
Response Time (Typical)	5ms
Panel Interface	LVDS
AD Board Input Interface	VGA, DVI-D
AD Board Input Power	DC12V
Power Consumption	12W, (15W with AD Board)
OSD Key	4 Keys (Power Switch, Menu, +, -)
OSD Control	Brightness, Color, Contrast, H/V Position...etc
Dimensions (mm)	396.0 x 173.6 x 12.1
Bezel Size(U/B/L/R)	9.6/9.6/7.9/7.9 mm
Weight (Net)	1 kg
Operating Temperature	0 °C ~ 50 °C
Storage Temperature	-20 °C ~ 60 °C

SSF= Panel+ LED Driving Board

SSH= Panel+ LED Driving Board + Control Board

Specifications are subject to change without notice.



All brands or product names are trademarks or registered trademarks of their respective companies.



Mechanical Drawing

Outline Dimensions

Unit: mm

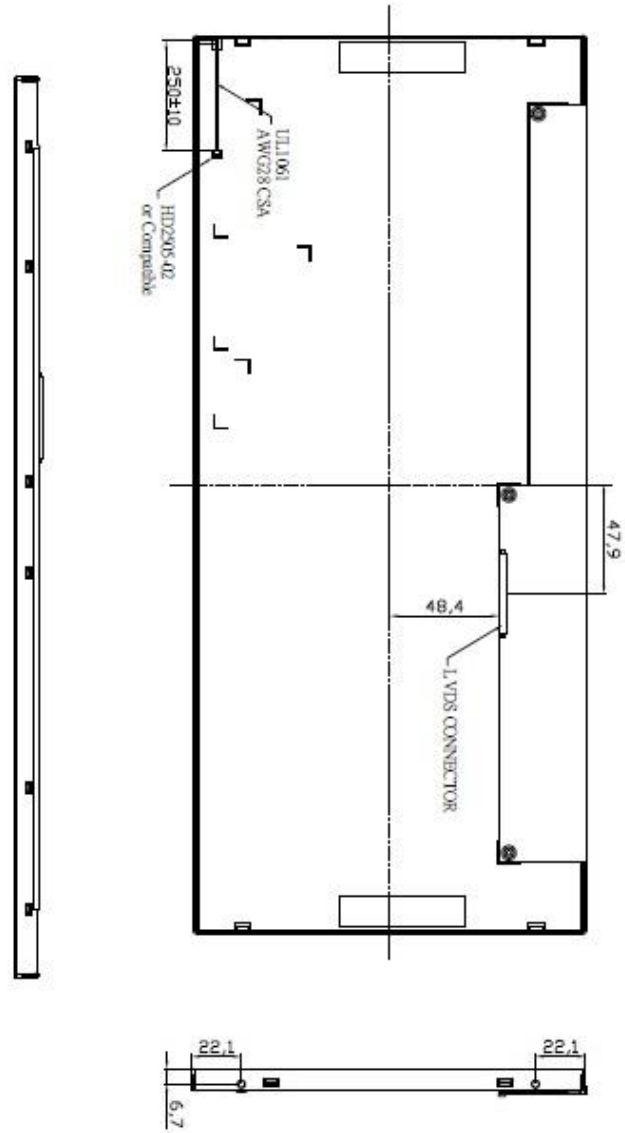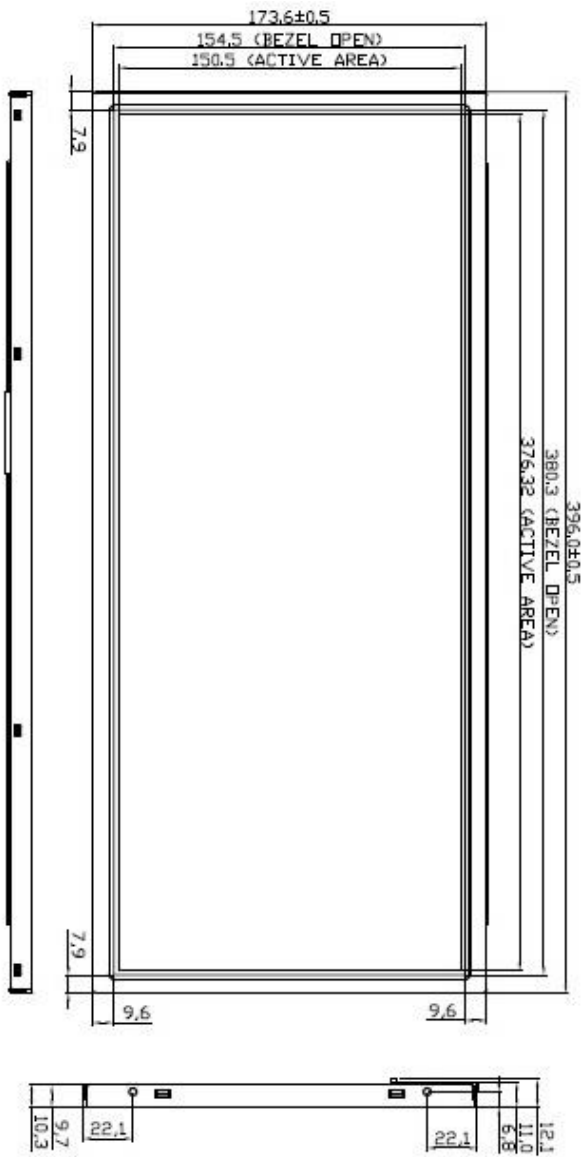



Ordering Information

Part Number	Description
SSF1515-ENN-A11	15.9",1000nits,1280*512,LID15,5in1,V02
SSH1515-ENN-G11	15.9",1000nits,1280*512,LID15,AD2662GD,DC12V,5in1,V02

Optional Accessories

Part Number	Description
980000460010	SET.OTHER,ADAPTER REWORK.60W PAA060F WITH.POWER DIN 4pin lock,P
810618301010 (Optional)	CABLE.POWER.AC.1830mm.(US Type).3PIN PLUG TO SOCKET.SVT(SPT-2)18AWG 3C BLACK,P.
810618301090 (Optional)	CABLE,POWER,AC,1830mm.(EU Type) 3PIN PLUG TO.SOCKET,H05VV-F 3G.0.75MMSQ BLACK,P
810618301050 (Optional)	CABLE,POWER,AC,1830mm.UK(FUSE) 3PIN PLUG TO.SOCKET,H05VV-F 3C(3G) 0.75MMSQ BLACK,P
810618301170 (Optional)	CABLE.POWER,AC,1830mm. (AU Type) 3PIN PLUG TO 2P SOCKET.LTSA 0.75MMSQ BLACK,P
810618301030 (Optional)	CABLE.POWER.AC.1830mm.(JP Type).2PIN PLUG Y TERMINAL TO. SOCKET.VCTF 3C 0.75MMSQ BLACK,P

By Customer Request

Glass	Tempered glass, AR coating.....
--------------	---------------------------------